

कार्यालय अधिशाषी अभियन्ता
विद्युत वितरण खण्ड प्रथम शाहजहाँपुर

पत्रांक 1458 / स्टीमेट नं० 482/SP 2022 - 2023 / डी दिनांक 30.11.2022

विषय:- निजी नलकूप तथा बत्ती का कनेक्शन प्राप्त करने हेतु पूर्ण रजि/सा योजना के अन्तर्गत नियम व शर्तें।

11 के०वी० फीडर हावड़ा

उपकेन्द्र:- हावड़ा

सेवा में,

श्री सर्वेश कुमार आत्मज श्री लाल कृष्ण
ग्राम हावड़ा ब्लॉक हावड़ा
जिला शाहजहाँपुर।

महोदय,

आपके आवेदन पत्र पत्र/रजिस्ट्रेशन संख्या 1008223894/17-11-2022 के संदर्भ में आपको नलकूप (7.5 HP) 80 पाठ तथा बत्ती 120 वाट का कनेक्शन लेने हेतु निम्न शर्तों सहित प्रस्ताव प्रस्तुत किया जाता है।

1. सर्विस कनेक्शन चार्ज रु० 4957=00 + 146035=00
 2. अ) सिस्टम लोडिंग चार्ज रु०
ब) सीक्यूरिटी रु० 2400=00
 3. कुल रूपया जमा करना है रु० 153392=00
 4. मोटर निरीक्षक शुल्क शासकीय कोष में 0.43 विद्युत पर कर एवं शुल्क के अन्तर्गत रु 700.00 जमा करना होगा।
 5. आपके अपने कनेक्शन के लिए स्वयं सम्बन्धित भण्डार केन्द्र शाहजहाँपुर से अपने बाहन के द्वारा सामान की दुलाई करनी होगी एवं पूर्ण लाइन का कार्य आवेदक द्वारा किश जायेगा।
 6. अ) आपको सीमेन्ट बालू तथा मिट्टी का निम्न मात्रा में प्रबन्ध केवल आखरी खम्बे, ऐंगिल, पोल तथा स्टे के लिए करना होगा।
प्रति खम्बा/सीमेन्ट 0.85 बोरी, गिटठी 9.1 घन फुट बालू 4.55 घन फुट
प्रति स्टे सीमेन्ट 0.35 बोरी, गिटठी 3.75 घन फुट, बालू 1.85 घन फुट
ब) आपके कार्य करने के लिए जो भी मजदूरो एवं टी. एण्ड पी. की आवश्यकता होगी, उसका प्रबन्ध आवेदककर्ता को करना होगा।
 7. आपके कनेक्शन को बिजली तभी दी जायेगी जब आप वायरिंग पूरा कराके वी० एण्ड एल० फार्म तथा मोटर निरीक्षक शुल्क का ट्रेजरी चालान अधिशासी अभियन्ता विद्युत वितरण खण्ड प्रथम शाहजहाँपुर के कार्यालय में जमा कर देंगे।
 8. कनेक्शन पर मोटर आर०पी०एम० के अनुसार शन्ट कॅपिस्टर लगाना आवश्यक है। तभी से संयोजना उर्जाकृत किया जायेगा।
- अ) लाइन निर्माण में कोई भी विवाद होगा तो विभाग की कोई जिम्मेदारी न होगी। समस्त जिम्मेदारी उपभोक्ता की होगी।
ब) उपभोक्ता द्वारा संयोजन स्थल पर कोठरी निर्माण के पश्चात् ही उर्जाकृत हो सकेगा।
स) आपका उपर लिखी शर्तें मान्य हो तो इस पत्र पाने के 30 दिन के अन्दर उपयुक्त रूपया जमा कर दे अन्यथा यह समझा जायेगा कि आप कनेक्शन लेने के इच्छुक नहीं हैं और अर्नेस्ट मनी का 200 रु० जब्त हो जायेगा।

नोट:- उक्त नियम व शर्तों में दी गई धनराशि परिवर्तीय है। अगर खण्डीय कार्यालय में इस धनराशि में कोई परिवर्तन होता है तो बड़ी हुई धनराशि तुरन्त कार्यालय में जमा करानी होगी।

पत्रांक...../तद दिनांक.....

अधिशाषी अभियन्ता

प्रतिलिपि उपखण्ड अधिकारी / शाहजहाँपुर / प्रचार्या / सुटार

अधिशाषी अभियन्ता

REPORT OF EXECUTIVE ENGINEER ELECTRICITY DISTRIBUTION DIVISION FIRST

REPORT


CONSUMER : SARVESH KUMAR		FATHER'S NAME : BAL KRISHNA		VILLAGE : HASAUA	
NIGOHI		SCHEME : FULL DEPOS		NAME OF SUBSTATION : NIGOHI	
FEEDER : DHAKIYA	DATE : 17.10.2022	LOAD : 8 HP	PROCESSING RS. : ₹ 100.00	DATE : 17.10.2022	
APPLICATION NO. : 1008222994	HT/LT : HT	APPLICATION NO. : 1008222994			

DATE AMOUNTING TO RS. **153392** ONLY HAS BEEN FRAMED FOR GIVING PTW/P SETS CONNECTION TO THE ABOVE CONSUMER
 7.5 H.P. FOR POWER AND 120 WATT FOR LIGHT. THE LINE SHALL BE TAPPED FROM **DHAKIYA** FEEDER OF **NIGOHI**
 SUBSTATION. THE PROPOSED CONSUMER SHALL BE FEED FROM **NEW** 11/0.4 KV 25 KVA SUBSTATION ON WHICH THE PRESENT
 CONNECTED LOAD IS **0** H.P. ONLY. EXISTING / NEW PROPOSED 11/0.4 KVA SUBSTATION.
 ALLOWABLE EXPENDITURE TO BE INCURRED THE BOARD @ RS. 1200.00 PER HP FOR 7.5 H.P.

EXISTING CONNECTION/ CLUSTER DETAILS:

A) CONSUMER'S NAME : _____ FATHER'S NAME: _____
 LOAD SANCTION/SC. NO. : _____ DATE : _____
 B) CONSUMER'S NAME : _____ FATHER'S NAME: _____
 LOAD SANCTION/SC. NO. : _____ DATE : _____

LINE CHART

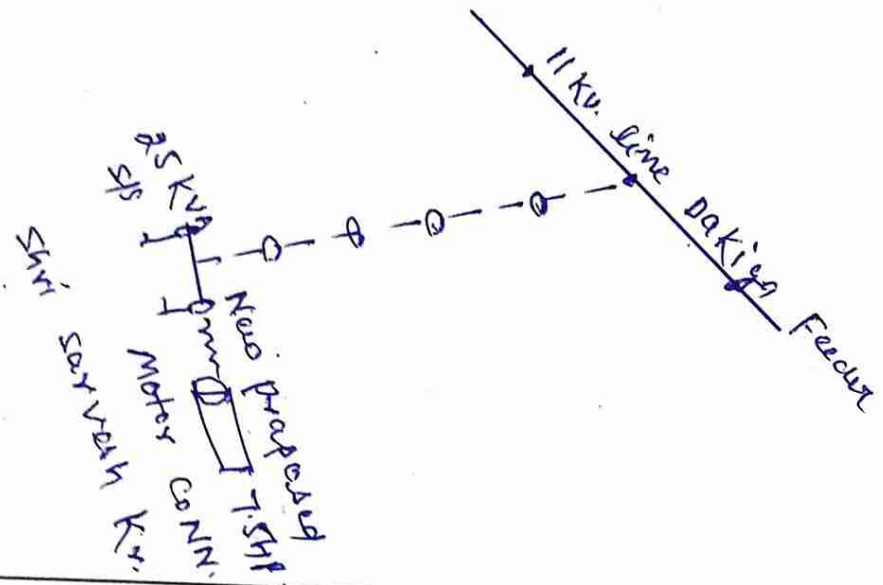


JUNIOR ENGINEER


SUB DIVISIONAL OFFICER

FOR DIVISION OFFICE USE

ESTIMATE COST	(+)	146035 ✓
GVT. SUBSIDY	(-)	0
PAYBLE LINE COST		146035 ✓
SERVICE CHARGES	(+)	4957 ✓
SECURITY	(+)	2400 ✓
TOTAL PAYBLE AMOUNT		153392 ✓

ESTIMATE SANCTION NO. : 492/C.P.P/2021-2023 DATE : 30.11.2021
 ESTIMATE CHECKED BY : _____ DATE : _____
 REVISED ESTIMATE SANCTION NO. : _____ DATE : _____





PROJECT ESTIMATE

MADHYANCHAL VIDYUT VITARAN NIGAM LTD.

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001

Ph No. 0522-2208737 GSTIN: 09AAECM0108J1ZO



Project Description : SARVESH KUMAR
Project Code : MVDP.SI.PD7271
Estimate Value : 151,417.92
Estimate Printout Date : 24.11.2022
Previous Approved Version : N.A.
Fund (Project Code) : PTW_DEPOSI

Sr. No.	PARTICULARS	UNIT	QTY	RATE(RS.)	AMOUNT
	Material & Service-Lines&Cable - MVDP.SI.PD7271,A				
1	STAY INSULATOR - 2700000012	No	4.000	30.00	120.00
2	T/F BASE ANGLE 65X65X6X2028 MM - 2700000355	No	2.000	1,778.00	3,556.00
3	STONE PAD 300X300X75MM - 2700000147	No	6.000	140.00	840.00
4	G.I.WIRE 6 SWG - 2700000003	KG	18.000	68.48	1,232.64
5	PCC POLE 8.5 MTR.LONG - 1500000000	No	6.000	2,721.00	16,326.00
6	G.I.PIN 11 KV WITH NUT - 2700000000	No	15.000	72.00	1,080.00
7	DANGER BOARD WITH CLAMP FOR 11 KV LINE - 1700000113	No	5.000	461.00	2,305.00
8	PVC TAPE - 2900000383	ROL	1.000	306.00	306.00
9	TEE-OFF CHANNEL - 1800000012	No	1.000	478.00	478.00
10	PIN INSULATOR 11 KV - 2700000006	No	15.000	196.00	2,940.00
11	DISC FITTING 45KN (T&C) - 1700000374	No	6.000	97.00	582.00
12	HOLDING CLAMP FOR PCC POLE 8.5 MTR. - 2500000002	No	4.000	304.00	1,216.00
13	11KV DISC INSULATOR (T&C) 45KN - 2700000253	No	6.000	167.00	1,002.00
14	STAY SET 16X1800 - 2700000131	No	4.000	402.00	1,608.00
15	11KV F-CLAMP FOR PCC POLE - 2500000048	No	4.000	265.00	1,060.00
16	G.I.WIRE 10 SWG - 2700000005	KG	1.000	247.00	247.00
17	STAY CLAMP 5/8" - 2500000034	PAA	4.000	304.00	1,216.00
18	ALLU. JOIN. SLEEVE F. ACSR WEASEL CONDU. - 1700000009	No	3.000	103.00	309.00

	TOP CHANNEL - 180000013	No	1.000	832.00	832.00
20	EARTH ROD 2540X20 MM - 1700000133	No	6.000	340.00	2,040.00
21	TOP CHANNEL/DROPPER CHANN. HOLDING CLAMP - 2500000315	No	11.000	259.00	2,849.00
22	A.C.S.R. WEASEL CONDUCTOR - 1000000028	M	618.000	23.98	14,819.64
23	CROSS ARMS V-TYPE 11 KV - 1700000104	No	4.000	744.00	2,976.00
24	DANGER BOARD - 2700000187	No	4.000	391.00	1,564.00
25	BARBED WIRE - 1400000219	KG	8.000	162.00	1,296.00
26	STAY WIRE 7/10 SWG - 2700000071	KG	20.000	60.36	1,207.20
27	DROPPER CHANNEL 100X50MM - 1800000007	No	1.000	748.00	748.00
28	TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006	No	1.000	56,780.00	56,780.00
29	TPMO 11 KV - 1700000327	No	1.000	18,292.00	18,292.00
	Sub Total - Material (Rs.)				139,827.48
	Total - Material & Service-Lines&Cable - (Rs.)				139,827.48
	FIXED CHARGE - MVDP.SJ.PD7271.K				
1	Charges				
	Sub Total - Charges (Rs.)				4,957.00
	Total - FIXED CHARGE - (Rs.)				4,957.00
	SECURITY - MVDP.SJ.PD7271.L				4,957.00
1	Charges				
	Sub Total - Charges (Rs.)				2,400.00
	Total - SECURITY - (Rs.)				2,400.00
	Contingency Charges - MVDP.SJ.PD7271.Z				2,400.00
1	Contingency Charges				
	Sub Total - Charges (Rs.)				4,233.44
	Total - Contingency Charges - (Rs.)				4,233.44
	Total(Materials + Services + Charges) (Rs.)				4,233.44
	Return Material - MVDP.SJ.PD7271.A				151,417.92
	Grand Total (Rs.)				151,417.92

Amount in Words: **One Lakh Fifty One Thousand Four Hundred Seventeen Rupees Ninety Two Paise Only**

[Signature] *[Signature]* SPO

At Request Doct# Book 4 of 200x226 of 47200=00
 Transformation cost of 94582=00
 3% Contingency of 4253=00
 Fixed of 4957=00
 Security of 2900=00
TOTAL of 153392=00

Est No. **492** 2022-2023 Date **30**
 Electy Dist Div-1st SPN
 Estimate Checked & *[Signature]*
 For Rs. **153392=00**

11/2024

[Signature] *[Signature]*