

सेवा में,

श्री मान उपखण्ड अधिकारी/अधिशाषी अभियंता

विद्युत् वितरण उपखण्ड कछौना / बालामऊ / खंड संडीला

संडीला, हरदोई।

महोदय,

झटपट/ निवेशन मित्र संयोजन के आवेदक संख्या 1008242635 दिनांक

जो की विद्युत् संयोजन हेतु आख्या प्रस्तुत किए जाने से संबंधित है।

आवेदक का नाम - राजीव कुमार शुक्ला S/O राम शंकर
नि० ए० स्तंभो जनरल - बक्सरा न० 605 गा० अकवल पुल
स्वच्छता आदेशिका

- १. आवेदित परिसर पर पूर्वे में बकाये की स्थिति - नहीं
- २. बकाए की स्थिति में संयोजन का पूर्ण विवरण - नहीं
- ३. परिसर की निकटतम एच० टी० / एल० टी० में से न्यूनतम दूरी - 330 मीटर

४. वितरण परिवर्तक के आधिभारिता की स्थिति - 2M0 25 के० वी० परित्तु प्रवाहित


लोड- R- Y- B-
५. ११ के० वि० पोषक के अधिभारिता की स्थिति - 165A

लोड- R- Y- B-
६. ३३/११ की० वी० उपकेंद्र के पावर परिवर्तक की स्थिति - 265A

लोड- R- Y- B-
७. मीटर स्थापना हेतु परिसर पर उपलब्ध स्थान की स्थिति - परिसर नहीं बना

८. परिसर पर संयोजन का प्रयोग - (वाणिज्य / घरेलू / औद्योगिक / अन्य) निजी नलकूप

९. बुक संख्या एवं ग्रुप संख्या - 2222 / 2221 / 2224 / 01 / 02 / 03 / 04 / 06

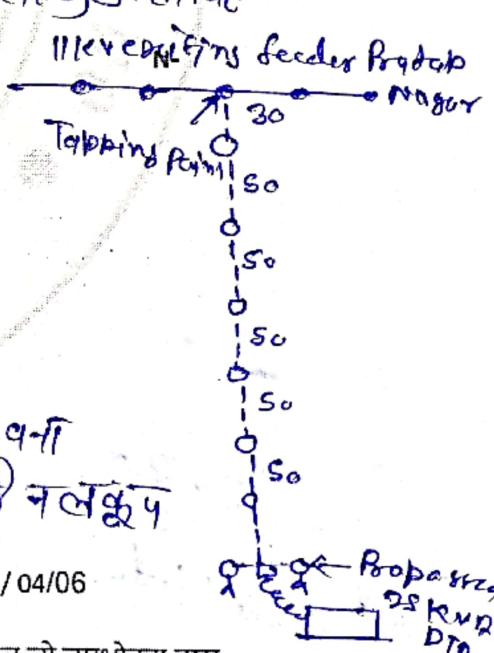

संस्तुति - आवेदक / उपभोक्ता कोसिंगल फेस अरमंड टाइप सर्विस केबल जो उपभोक्ता द्वारा देय व सिंगल फेज स्टैटिक एनर्जी मीटर दे कर संयोजन की संस्तुति की जाती है।
नोट - उपभोक्ता को HT लाइन से 330 मीटर की 11KV लाइन बनाने हुए उपलब्ध पोल पर 2M0 25KVA परित्तु (स्थापित कर 000) नीचे स्थापन हेतु परिसर

टी० जी० - २
जे० ई०
उपलब्ध हो के उपरान्त संयोजन किया किमा पर बनाया है।

REPORT


- 1 This estimate an amount Rs.153670.00 has been to covered estimate g/s 8hp ptw new connection to sri rajiv kumar shukla s/o ram shankar vill-ekghara akbarpur block-ahirori hardoi.
- 2 The prapossed 330 mtr hT line tapped From existing 11kv feeder- pratap nagar emaneting from 33/11 kv S/S beniganj -HARDOI.
- 2 The rates provided in the estimate are according with cost data book/cost schedule for the year
- 3 The work will be executed through out side /agency/under supervision of S.D.O-KACHAUNA & JE 33/11 KV S/S beniganj newhardoi.
- 4 The Excutive EDD-SANDILA HDI will be keep effective control at this work.


rs

S.D.O

Line chart

The Estimate of GIS OHP PTW New Connection to Sri Rajiv Kumar Shukla s/o Ram Shankar R/o Vill- Ak Ghara Akbar bur block Ahirani Hordai. Against Application No- 1000242635

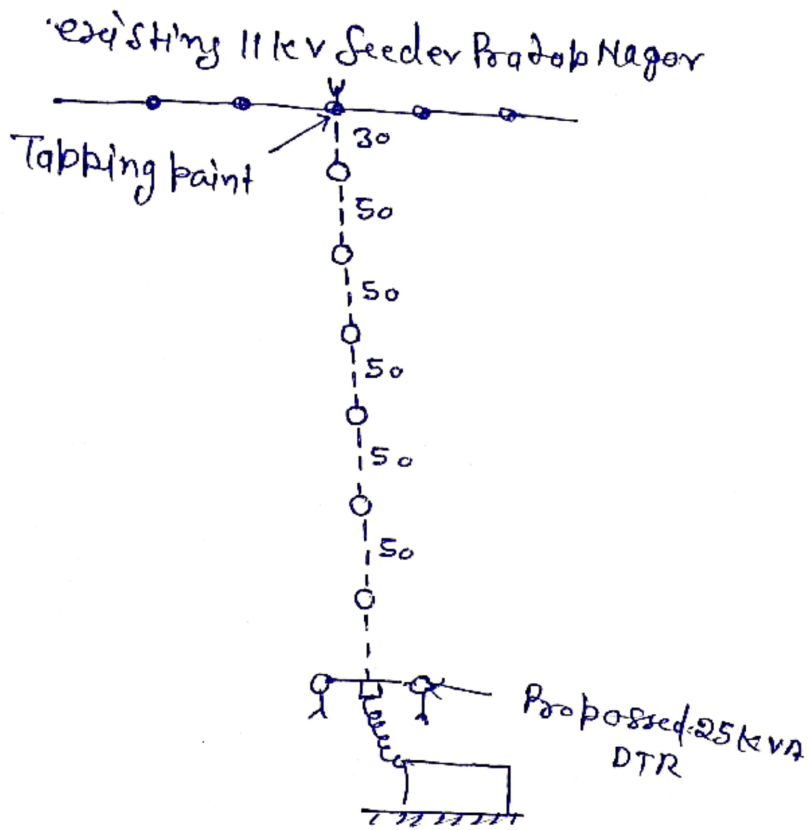

OHP PTW New Connection to
Sri Rajiv Kumar Shukla

S.D.D



PROJECT ESTIMATE

MADHYANCHAL VIDYUT VITARAN NIGAM LTD.

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001

Ph No. 0522-2208737 GSTIN: 09AAECM0108J1ZO

Project Description : PTW NEW CONN TO RAJIV KUMAR SHUKLA

Project Code : MVDP.HR.PD6882

Estimate Value : 153,670.40

Estimate Printout Date : 07.02.2023

Previous Approved Version : N.A.

Fund (Project Code) : PTW_DEPOSI

| SR. NO. | PARTICULARS | UNIT | QTY | RATE(RS.) | AMOUNT |
|---------|--|------|----------|-----------|------------------|
| | Material & Service-Lines&Cable - MVDP.HR.PD6882.A | | | | |
| 1 | 11 KV V-TYPE STEEL CROSS-ARM 65X65X6 MM - 2700000161 | No | 6.000 | 744.00 | 4,464.00 |
| 2 | STAY COMPLETE - 2700000152 | No | 3.000 | 2,027.00 | 6,081.00 |
| 3 | SS BASE ANGLE - 1800000053 | No | 2.000 | 1,778.00 | 3,556.00 |
| 4 | DISC INSULATOR 11 KV - 1700000124 | No | 6.000 | 167.00 | 1,002.00 |
| 5 | DISC FITTING FOR WESEL - 1700000123 | No | 6.000 | 97.00 | 582.00 |
| 6 | G.I.WIRE 6 SWG - 2700000003 | KG | 153.000 | 79.00 | 12,087.00 |
| 7 | DROPPER ANGLE - 1800000006 | No | 2.000 | 748.00 | 1,496.00 |
| 8 | TEE-OFF CHANNEL - 1800000012 | No | 1.000 | 478.00 | 478.00 |
| 9 | PCC POLE 8.5 MTR.LONG - 1500000000 | No | 8.000 | 2,721.00 | 21,768.00 |
| 10 | EARTHING COMPLETE - 2700000150 | No | 8.000 | 838.00 | 6,704.00 |
| 11 | A.C.S.R. WEASEL CONDUCTOR - 1000000028 | M | 1025.000 | 24.00 | 24,600.00 |
| 12 | STONE PAD 300X300X75MM - 2700000147 | No | 8.000 | 140.00 | 1,120.00 |
| 13 | PIN INSULATOR WITH PIN 11 KV - 2700000009 | No | 24.000 | 268.00 | 6,432.00 |
| 14 | GUARDING ANGLE 50X50X6X2500 - 1800000113 | No | 8.000 | 512.00 | 4,096.00 |
| 15 | 11KV F-CLAMP FOR PCC POLE - 2500000048 | No | 6.000 | 265.00 | 1,590.00 |
| 16 | HOLDING CLAMP FOR PCC POLE 8.5 MTR. - 2500000002 | No | 24.000 | 0.10 | 2.40 |
| 17 | TOP CHANNEL - 1800000013 | No | 1.000 | 832.00 | 832.00 |
| | Sub Total - Material (Rs.) | | | | 96,890.40 |
| | Total - Material & Service-Lines&Cable - (Rs.) | | | | 96,890.40 |

| Material & Service-Plant&Machinery - MVDP.HR.PD6882.B | | | | | |
|--|---|-----|-------|-----------|------------|
| 1 | TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006 | No. | 1.000 | 56,780.00 | 56,780.00 |
| Sub Total - Material (Rs.) | | | | | 56,780.00 |
| Total - Material & Service-Plant&Machinery - (Rs.) | | | | | 56,780.00 |
| Total(Materials + Services + Charges) (Rs.) | | | | | 153,670.40 |
| Return Material - MVDP.HR.PD6882.A | | | | | |
| Grand Total (Rs.) | | | | | 153,670.40 |

Amount in Words: One Lakh Fifty Three Thousand Six Hundred Seventy Rupees Forty Paise Only

[Handwritten Signature]
nr

8'00