



कार्यालय अधिशासी अभियन्ता  
विद्युत वितरण खण्ड पंचम  
हसनगंज, उन्नाव

Email :- ead5.unnao@gmail.com  
No. 94136

पत्रांक 1935 / वि०वि०ख०ह०उ० / तकनीकी आख्या दिनांक : 05.04.2023

विषय : 08 एच०पी० निजी नलकूप विद्युत संयोजन हेतु तकनीकी आख्या प्रेषित करने के सम्बन्ध में।

उपखण्ड अधिकारी  
विद्युत वितरण उपखण्ड

आवेदन संख्या:- 1008257866

हसनगंज - उन्नाव

दिनांक:- 04/04/2023

श्री संजय कुमार पुत्र स्व० राम नरेश ग्राम व पो० अग्रियर कला, वि०ख०...  
मियागंज, तहसील-हसनगंज, जिला-उन्नाव, मो०- 9956757632 द्वारा 08 एच०पी० निजी  
नलकूप विद्युत संयोजन हेतु आवेदन किया गया है।

कृपया उपरोक्त विद्युत संयोजन हेतु तकनीकी आख्या निम्नांकित बिन्दुओं सहित प्रेषित करें-  
परिसर पर पूर्व में विद्युत संयोजन एवं विद्युत बकाए की स्थिति।

01 विद्युत संयोजन एल०टी० लाइन से प्रस्तावित है अथवा नया ट्रांसफार्मर प्रस्तावित है।

02 यदि संयोजन एल०टी० से प्रस्तावित है तो पोषित ट्रांसफार्मर की क्षमता एवं उसके पॉजिटिव भार का विवरण।

03 संस्तुति।

04 लाइन चार्ट।

JEC Miyaganj  
Estms & Provide  
(Signature)

(Signature)  
अधिशासी अभियन्ता  
हसनगंज, उन्नाव

पत्रांक 1935 / वि०वि०ख०ह०उ० / तकनीकी आख्या दिनांक 05.04.2023

प्रतिलिपि अवर अभियन्ता 33/11 के०वी० सबस्टेशन- मियागंज, उन्नाव को सूचनाार्थ एवं  
आवश्यक कार्यवाही हेतु प्रेषित :-

कन० न०- 73000483504 पर बनाया पुरा बिल जमा है।  
13/04/2023 को पुरा बिल जमा किया गया।

Feeder- Rasulabad.  
Distance = 470 Mtr.

11F 25 K.VA New Proposed  
Connection सम्बन्धित प्रयोजन  
सम्बन्ध है।

(Signature)  
J-E Miyaganj

(Signature)  
अधिशासी अभियन्ता  
हसनगंज, उन्नाव

नोट - 11 K.V Feeder Rasulabad, Aurus को फिडर 05 MVAT (PI) से चकर रहे है।  
जिनका लोड 320 Amp Maximum जा रहा है। जिससे ओवर लोड की समस्या  
हा रही है। कृपया P.F. W से सम्बन्धित कन० के ओवर लोड की समस्या को देखते हुए  
अपने स्तर से जारी करने की कृपया करें।


(Signature)  
J-E Miyaganj

# REPORT

This Estimate Amounting to Rs.....00 only has been framed to cover the cost of construction To SRI SANJAY KUMAR S/O SRI LET RAM NARESH Vill+ ,P.O -ARIYAR KALA MO. NO.-9956757632 Block Miyaganj Unnao 33/11 KV S/S Miyaganj Unnao, 11KV Feeder-RASULABAD Under Deposit work of load 08 HP. vide PTW application No. 1008257866 DATE:-04.04.2023

Rates provided in this estimate as per cost data book 2022-2023. & Direct supervision of SDO ESDS III Miyaganj, UNNAO after sanction of estimate.

## LINE CHART

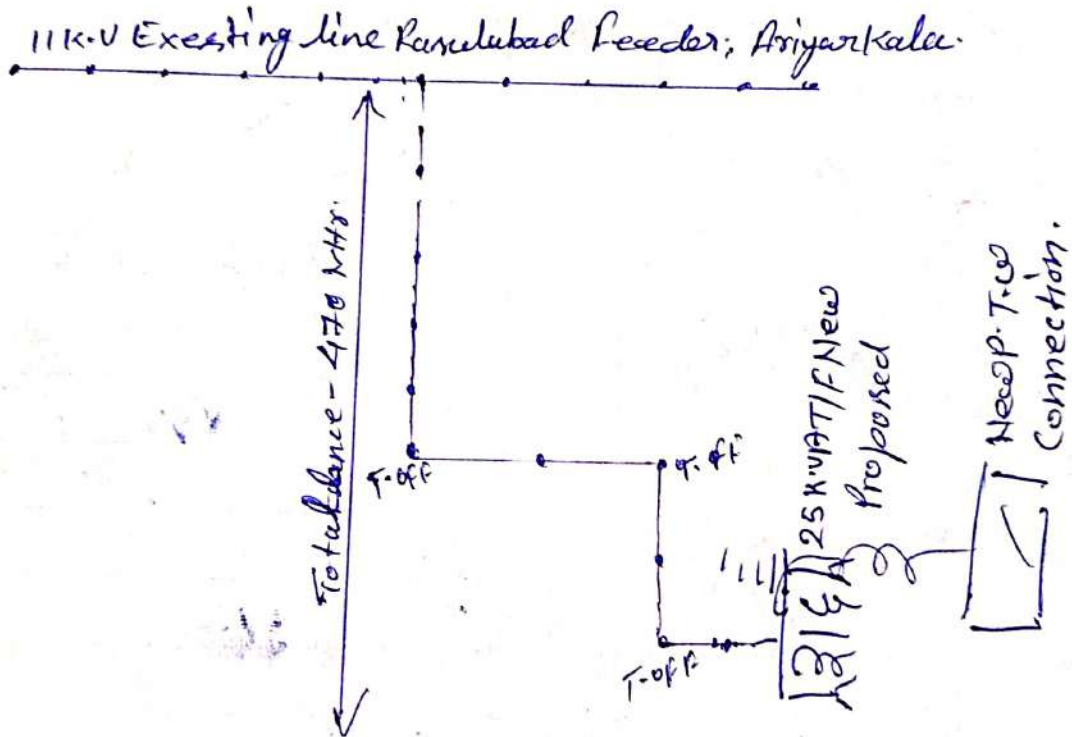

*[Signature]*  
S.D.O.

Miyaganj

*[Signature]*  
J.E.

Miyaganj





## PROJECT ESTIMATE

**MADHYANCHAL VIDYUT VITARAN NIGAM LTD.**

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001

Ph No. 0522-2208737 GSTIN: 09AAECM0108JIZO

Project Description

: SANJAY KUMAR (MO.NO.-9956757632)

Project Code

: MVDP.UN.PD4274

Estimate Value

: 196,053.80

Estimate Printout Date

: 13.04.2023

Previous Approved Version

: N.A.

Fund (Project Code)

: PTW\_DEPOSI

SR. NO.	PARTICULARS	UNIT	QTY	RATE(RS.)	AMOUNT
	<b>Material &amp; Service-Lines&amp;Cable - MVDP.UN.PD4274.A</b>				
1	11 KV STAY INSULATOR - 2700000097	No	6.000	150.00	900.00
2	EARTHING COMPLETE - 2700000150	No	12.000	838.00	10,056.00
3	11KV COMP. POLY. DISC INSULATOR 45KN T&C - 2700000173	No	15.000	412.00	6,180.00
4	11KV F-CLAMP FOR PCC POLE - 2500000048	No	7.000	265.00	1,855.00
5	A.C.S.R. WEASEL CONDUCTOR - 1000000028	M	1600.000	23.99	38,384.00
6	FUSE SET 11 KV - 2700000059	SET	1.000	1,167.00	1,167.00
7	G.I.WIRE 10 SWG - 2700000005	KG	50.000	108.56	5,428.00
8	STAY SET 16X1800 - 2700000131	No	6.000	2,027.00	12,162.00
9	SS BASE ANGLE - 1800000053	No	2.000	1,778.00	3,556.00
10	TEE-OFF CHANNEL - 1800000012	No	3.000	478.00	1,434.00
11	PCC POLE 8.5 MTR.LONG - 1500000000	No	12.000	2,721.00	32,652.00
12	11 KV COMPOSITE POLYMER PIN INSULATOR - 2700000193	No	21.000	268.00	5,628.00
13	CROSS ARMS V-TYPE 11 KV - 1700000104	No	7.000	744.00	5,208.00
14	TOP CHANNEL - 1800000013	No	1.000	832.00	832.00
5	DROPPER CHANNEL 100X50MM - 1800000007	No	1.000	748.00	748.00
6	TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006	No	1.000	56,780.00	56,780.00
	<b>Sub Total - Material (Rs.)</b>				<b>182,970.00</b>

Total - Material & Service-Lines&Cable - (Rs.)							
Material & Service-Plant&Machinery - MVDP.UN.PD4274.B							182,970.00
1	HOLDING CLAMP FOR PCC POLE 8.5 MTR. - 2500000002		No	15.000		304.00	4,560.00
Sub Total - Material (Rs.)							4,560.00
1	MATERIAL & MAINTENANCE - 1000001733		No	1.000		1.00	4,560.00
Sub Total - Services (Rs.)							1.00
Total - Material & Service-Plant&Machinery - (Rs.)							1.00
T&P Charges - MVDP.UN.PD4274.Q							4,561.00
1	T&P Charges						
Sub Total - Charges (Rs.)							2,897.19
Total - T&P Charges - (Rs.)							2,897.19
Contingency Charges - MVDP.UN.PD4274.Z							2,897.19
1	Contingency Charges						
Sub Total - Charges (Rs.)							5,625.61
Total - Contingency Charges - (Rs.)							5,625.61
Total (Materials + Services + Charges) (Rs.)							5,625.61
Return Material - MVDP.UN.PD4274.A							196,053.80
Grand Total (Rs.)							196,053.80


Amount in Words:

One Lakh Ninety Six Thousand Fifty Three Rupees Eighty Paise Only

11k.V Existing Ling Rasulabad Feeder, Arigon Kalat

*Imad Mijajani*

Total Distance - 470 Mtr

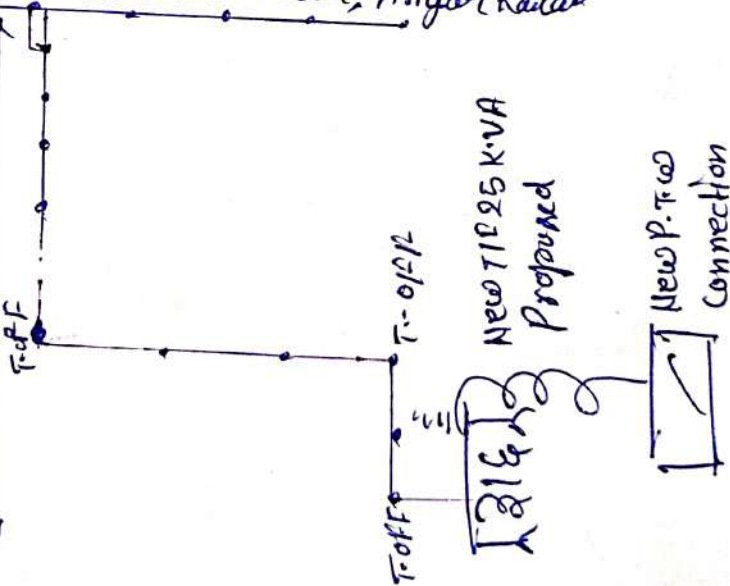

*J-E Mijajani*