



55

कार्यालय अधिशासी अभियंता  
विद्युत वितरण खण्ड-बिसवाँ  
मध्योचल विद्युत वितरण निगम लिमिटेड,  
सीतापुर।

E-mail: eddbiswan1017@gmail.com

पत्रांक: 477

/वि0वि0ख0बि0/सी0

दिनांक: 20-04-2023

निजी नलकूप संयोजन हेतु टी0सी0

सेवा में,

पूर्ण जमा योजना

SRI SANKTA PRASAD  
S/O SRI GOKARAN  
ADDRESS-VILL SARVAHANPUR, MANPUR  
BISWAN, SITAPUR  
Required Load - 05 HP  
Mobile No - 7523859432  
Application No - 1008259992

पंजीकृत संख्या- 29 दिनांक- 11-04-2023  
स्वीकृत विद्युत भार - 05 HP  
विधा - LMV-5  
प्राक्कलन धनराशि 171,839.00  
लाइन- 300 Mtr. HT

आपके विद्युत कनेक्शन के आवेदन पत्र- 1008259992 दिनांक- 11-04-2023 के बारे में सूचित किया जाता है कि आप निम्न धनराशि पोर्टल पर निर्धारित समय में जमा करें।

जमा किये जाने वाले धन का विवरण			
क्र0सं0	मद (Particulars)	जमा धनराशि का विवरण	कार्य का विवरण
1	प्राक्कलन धनराशि (Estimate Cost)	165,382.00	1. ट्रांसफार्मर- 25 के0वी0ए0, मी0- 300
2	मीटर धनराशि (Meter Cost)	4957.00	2. खण्ड द्वारा किया जाने वाला व्यय-
3	जमानत धनराशि (Security)	1500.00	3. लाइन पर व्यय रू0-
	कुल धनराशि	171,839.00	4. सबस्टेशन पर व्यय रू0-

- आपको बिजली का कनेक्शन तभी दिया जायेगा जब आपका प्रतिष्ठान पूर्ण रूपेण वी0 एण्ड एल0 फार्म के अनुसार पूर्ण होगा।
- आप रू0- 500/- मीटर निरीक्षण के रूप में शासकीय कोष में जमा कराके रसीद वी0 एण्ड एल0 फार्म के खण्ड कार्यालय में उपलब्ध करावेगे।
- लाईन बनाने सम्बन्धी किसी भी विवाद की स्थिति में विभाग का कोई उत्तरदायित्व नहीं होगा।
- लाईन प्राक्कलन के अनुसार ही उपभोक्ता द्वारा बनाई जायेगी तथा दूरी बढ़ने पर आवश्यक सामग्री की धनराशि पुनः जमा करनी होगी।
- यदि आप आवश्यक धनराशि 90 दिन के अन्दर जब आपको टी0सी0 प्राप्त होने पर जमा नहीं करते हैं तो आपका स्वीकृत भार निरस्त माना जायेगा एवं जमा की गई धनराशि जब्त कर ली जायेगी।
- भविष्य में पत्र व्यवहार करते समय पंजीकृत संख्या अवश्य लिखें।
- आप अपना अनुबन्ध कराने हेतु इस कार्यालय में जायें तो अपनी प्रमाणित फोटो की एक प्रति भी साथ लायें।  
नोट- सहायक निदेशक, विद्युत सुरक्षा निदेशालय, उ0प्र0 शासन, मो0 कजियारा-सीतापुर से निर्धारित धनराशि का चालान पास कराकर स्टेट बैंक में जमा कर प्रति खण्ड कार्यालय में उपलब्ध करायें।

पत्रांक: /वि0वि0ख0बि0/सी0

दिनांक:

प्रतिलिपि निम्न को सूचनार्थ हेतु प्रेषित:-

- उपखण्ड अधिकारी, विद्युत वितरण उपखण्ड बिसवाँ/लहरपुर/हरगांव, सीतापुर।
- अनुबन्ध सहायक, विद्युत वितरण खण्ड बिसवाँ, सीतापुर।
- सहायक अभियन्ता (मीटर्स) विद्युत परीक्षण खण्ड, सीतापुर को आवश्यक कार्यवाही हेतु प्रेषित।

अधिशासी अभियंता

अधिशासी अभियंता

Head Name: Rajeevan  
 Estate: Sanketa Project  
 So. No: Gopakorn  
 Vill: Sasvahanpur Illa  
 Post: Manpur Taluk: Rajeevan  
 Dist: Sidhapur

This estimate amounting to Rs. 152,999.00 Only has been framed to cover the cost for fitting supply to the above consumer who has been sanctioned an off peak sight load of 6.8 HP and L&S load of ..... KVA for the process of ..... Vide ..... No. ..... Dated .....

The HT/LT line would be tapped from Gopakorn (B) feeder commencing from ..... meter and will be constructed on ..... And will have ..... Nos. supports will be earthed and ..... No. supports will be concreted. The IIV/RV SS will be constructed on ..... with a transformer of ..... KVA capacity/increasing capacity of SS from ..... KVA to ..... KVA.

SDO  
Shashi  
 JE

Sl. No.	Particulars	Head of Account	Amount
1	Transformer (11)		56816.00
2	Transformer (0)		94582.00
3	Transformer (1)		2000.00
	TOTAL FOR EST.		152998.00

Sl. No.	Particulars	Qty	Rate	Amount	Sl. No.	Particulars	Qty	Rate	Amount
1	PCC Pole 8.5 Mtr.	05	3721	18605	1	11kV KV Standard SB			
2	V Type X arm	05	744	3720	2	Transformer 25 KVA	01	94582	94582
3	X arm Holding Clamp	05	301	1505	3	Opoid Charges of Transformer			
4	F - Clamp	05	265	1325	4	Mending of Transformer			
5	11kv Pin with insulator	15	123	1845	5	Carriage of Transformer			
6	Disc insulator	63	384	1152	A	Carriage Disassembled Tr			
7	SS Base Angle				B	Carriage New Transformer			
8	Top Channel				6	Cost to the cost of Transformer replaced KVA 5			
9	Dropout channel				7	Above fee Transformer			
10	T-off channel	01	478	478		Conductors on item No. ....			
11	Stay set complete	02	1961	3922					
12	Earthing complete	05	888	4440					
13	Jacob's wasset conductor	925	238	22215					
14									
15	TOTAL			53949.00					
	45% Contingency Charge			24287.00					
	TOTAL			56816.00					
	Grand Total Est.			152998.00					

Sl. No.	Particulars	Qty	Rate	Amount
1	LC Cable 11 kv			
2	LC Cable 23 kv			
3	LC Cable 33 kv			
4	LC Cable 33 kv			
5	Insulator			
	TOTAL			

Sl. No.	Particulars	Qty	Rate	Amount
1	Labour Charge for fitting of cable			
2	Material Charge for fitting of cable			
3	Transport Charge of material			
	TOTAL			2000.00

WORK CODE NO. 402141/314/2023-24  
 CHARGEABLE TO DEPT. RS. NIL  
 CHARGEABLE TO CONS. RS. NIL  
 SANCTIONED FOR TOTAL RS. 171839.00  
 IN WORDS RS. One Lakh Seventy One Thousand Eighty Three Hundred Thirty Nine Only  
 - SP -  
 EX. EN  
 55

For Citing Supply to Sankta Prasad s/o G. Lakshman

At Vill - Sarvahanpur, P.O. Manjhin  
Bijapur District.

For 08 HP Load and 02 Poles.

1. Total length of Line 300 mtr. HT

2. No of Support 07 LT  
01 PCC  
01 Jolt  
01 Pole

3. No of Stay 04

4. No of Bunding 07

5. Capacity T/F 2.5 KVA


6. Existing Capacity 02 KVA

*S. K. K.*

JUNIOR ENGINEER

SUB DIVISIONAL OFFICER

Line Chart

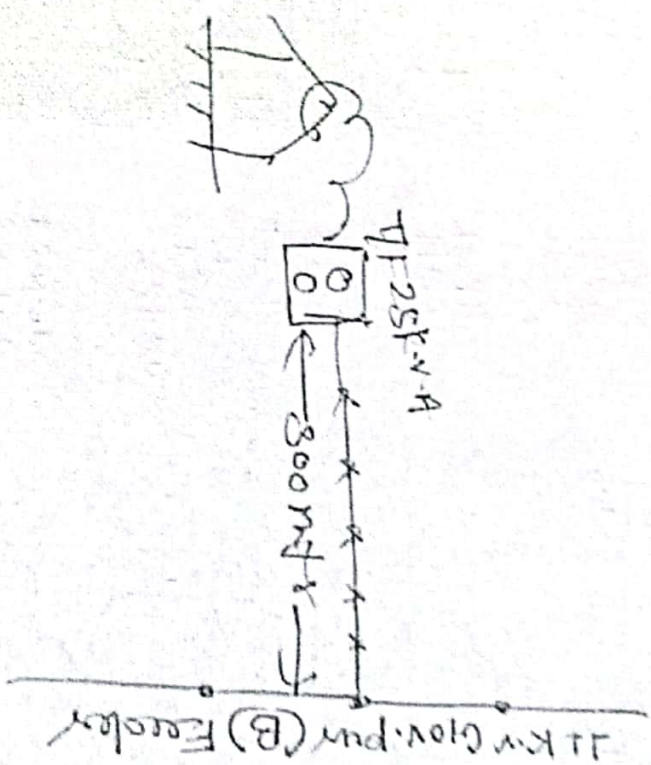

*S. K. K.*

JUNIOR ENGINEER

SUB DIVISIONAL OFFICER