DAKSHINANCHAL VIDYUT VITRAN NIGAM LTD.

ELECRICITY DISTRIBUTION DIVISION II LALITPUR

Tentative Estimate

NAME OF WORK: Given new Service Connection, PTw of SMT BADI DULAIYA W/O JANDAIL SINGH, R/O

VILL MAINWAR, BLOCK MEHARONI

NAME OF SITE: Near VIII MAINWAR NAME OF 11 KV FEEDER: SAUJANA


HEAD: FULL DEPOSITE

NAME OF SUB STATION: 33/11 KV SAUJANA

Aplication No. 1008261890

S No.	DADTICHUAN				
1	PARTICULAR / DESCRIPTION PCC POLE 8.5 M LONG	UNIT	QTY	RATE	AMOUNT
	11 KV CROSS ARAN WWW	Nos	4	2721.00	10884.00
3	11 KV CROSS ARM "V" TYPE MS ANGLE 65X65X6 MM	Nos	2	821.00	1642.00
	CROSS ARM HOLDING CLAMP WITH BOLTS & NUTS	Nos	2	304.00	608.00
4	11 KV PIN INSULATOR AND GI PIN WITH N&B	Nos	9	. 268.00	
5	11 KV DISK INSULATOR WITH DISK FITTING	Nos	6		2412.00
6	F - BRACKET FOR FITTING TOP INSULATOR WITH BAN	Nos	- 0	264.00	1584.00
- 7	ACSR WEASEL CONDUCTOR	Mtr	420	265.00	530.00
8	STAY SET COMPLETE (STAY ROD, WIRE, CLAMP, B&N	_	430	24.00	10320.00
9	EARTHING SET COMPLETE (MS ROD, WIRE ETC.)	Nos	4	2027.00	8108.00
10	MS T - OFF CHANNEL 125X65X1300 MM	Nos	- 4	838.00	3352.00
11	MS TOP CHANNEL 125X65X2240 MM	Nos	1	478.00	478.00
12	MS DROPPER CHANNEL 100X50X2028 MM	Nos	1	832.00	832.00
13	MS BASE ANGLE FOR T/F 75X75X6X2028 MM	Nos	1	748.00	748.00
14	11/0.4 KV, 25 KVA TRANSFORMER COMPLETE	Nos	2	1778.00	3556.00
15	D/P CLAMP COMPLETE	Nos	1	56780.00	56780.00
	11 KV TPMO	Nos	5	259.00	1295.00
10		Nos	1	18242.00	18242.00
TOTAL COST OF MATERIAL					
GRANT TOTAL					121371.00 121371.00
SAY TOTAL IN Rs.					121,371.00

LINE CHART

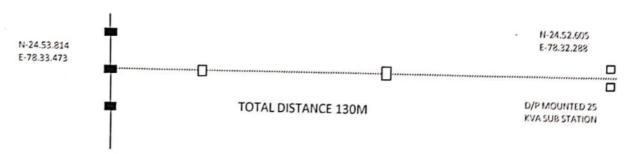

NOTE: (1) LINE SURVEY HAS BEEN DONE IN PRESENCE OF CONSUMER AT PARTICULER SITE

(2) CARTAGE & ERRACTION WORK WILL BE DONE BY CONSUMER.

S.D.O. **EDSD VII MADAWARA**

TRILOKI MADDHESHIA JUNIOR ENGINEER

ELECTRICITY DISTRIBUTION DIVISION II LALITPUR DAKSHINANCHAL VIDYUT VITRAN NIGAM LTD.

ESTIMATE

1	NAME OF WORK- CONSTRUCTION	Given new Service Connection, PTw of SMT BADI DULAIYA W/O JANDAIL SINGH, R/O VILL MAINWAR, BLOCK MEHARONI
2	SITE OF WORK	Near Vill MAINWAR
3	TYPE OF CONNECTION	LMV 05
4	PROCESSING FEE	
5	SANCTIONED LOAD	8 HP
6	OFFICE LETTER NO. /APPLICATION NO.	1008261890
7	HEAD .	FULL DEPOSITE
8	SUB STATION	33/11 KV Substation SAUJANA
9	NAME OF 11 KV FEEDER .	SOJANA

ABSTRACT OF CHARGES

S.No.	CHARGE TO CONSUMMER	AMOUNT (Rs)
1	FIXED CHARGE TO 40 MTR	2,036.00
2	SYSTEM LOADING CHARGE	1,800.00
- 3	METER COST	2,960.00
4	COST OF LINE & S/S (130 M)	121,371.00
5		
	TOTAL (Rs.)	128,167.00

ESTIMATE REPORT

This estimate amounting to Rs 128167.00 only under the head Full deposite has been framed to cover the cost of above work.

It is proposed to costruct an 11 KV Main / Spur line of 130 meters lenght. Double pole structures at Section / T-off location 01 No. Double Pole mounted Village type Sub Station as per standard practice of the Board. The 11 KV Line will be constructed on PCC Pole with ACSR Weasel Conductor and GI wire No. 6 SWG shall be provided as neutral cum earth wire in L.T. line. The above work will be done by consummer with cartage and erraction.

The proposed line will be Tapped from the existing 11 KV main line near Village MAINWAR as comes on 11 KV SOJANA Feeder emanating from 33/11 KV Sub Station SAUJANA

Rates provided in the estimate are as per schedules as prescribed by RESSPO Lucknow.

The estimate will be operated upon under the supervision of the under- signees after sanction.

S.D.O. EDSD VII MADAWARA

TRILOKI MADDHESHIA JUNIOR ENGINEER