


REPORT

This Estimate Amounting to Rs.....00 only has been framed to cover the cost of construction To SMT ANITA SINGH S/O SRI YOGENDRA PAL SINGH Vill+ ,P.O - PAIGAMBAR PUR ,KOTARA MO. NO.-9721295969 Block Miyaganj Unnao 33/11 KV S/S Miyaganj Unnao, 11KV Feeder-RASULABAD Under Deposit work of load 08 HP. vide PTW application No. 1008264418 DATE:-22.04.2023

Rates provided in this estimate as per cost data book 2022-2023. & Direct supervision of SDO EDSO III Miyaganj, UNNAO after sanction of estimate.

LINE CHART

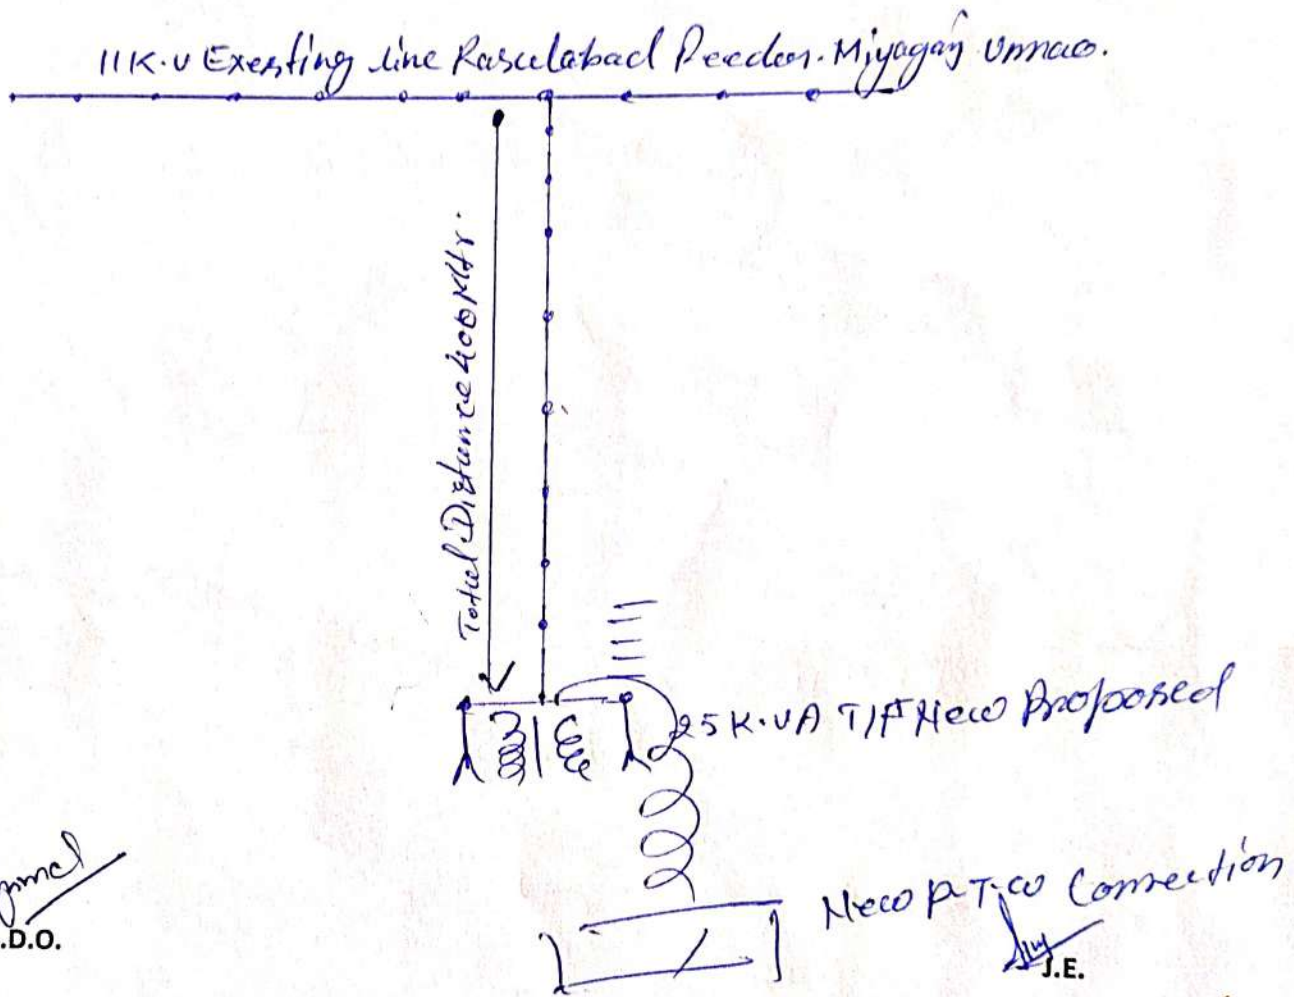

Jamal
S.D.O.

Miyaganj

Miyaganj



कार्यालय अधिशासी अभियन्ता
विद्युत वितरण खण्ड पंचम
हसनगंज, उन्नाव

LUOP-UN-PO4518

Email :- edd5.unnao@gmail.com
Mo. 941509913

पत्रांक 2574 / वि0वि0ख0ह0उ0 / तकनीकी आख्या

दिनांक : 27.04.2023

विषय : 08 एच0पी0 निजी नलकूप विद्युत संयोजन हेतु तकनीकी आख्या प्रेषित करने के सम्बन्ध में।

उपखण्ड अधिकारी
विद्युत वितरण उपखण्ड
मियागंज-उन्नाव

आवेदन संख्या:- 1008265841
दिनांक:- 26/04/2023

श्री अश्वनी कुमार पुत्र श्री बम्बा लाल ग्राम व पो सिधूर नेवाती वि0ख0- औरास,
तहसील-हसनगंज, जिला-उन्नाव, मो0- 9648609789 द्वारा 08 एच0पी0 निजी नलकूप विद्युत
संयोजन हेतु आवेदन किया गया है।

कृपया उपरोक्त विद्युत संयोजन हेतु तकनीकी आख्या निम्नांकित बिन्दुओं सहित प्रेषित करें:-
परिसर पर पूर्व में विद्युत संयोजन एवं विद्युत बकाए की स्थिति।

- 01 विद्युत संयोजन एल0टी0 लाइन से प्रस्तावित है अथवा नया ट्रान्सफार्मर प्रस्तावित है।
- 02 यदि संयोजन एल0टी0 से प्रस्तावित है तो पोषित ट्रान्सफार्मर की क्षमता एवं उसके पोषित भार का विवरण।
- 03 संस्तुति।
- 04 लाइन चार्ट।

J. E. Mijajay
Estimate Officer
(Jm)

अधिशासी अभियन्ता
हसनगंज, उन्नाव

पत्रांक 2574 / वि0वि0ख0ह0उ0 / तकनीकी आख्या

दिनांक 27.04.2023

प्रतिलिपि अवर अभियन्ता 33/11 के0वी0 सबस्टेशन- मियागंज, उन्नाव को सूचानार्थ एवं

आवश्यक कार्यवाही हेतु प्रेषित :-

नोट - 05 MV A TIA 1st पर दो फिडर का लोड 350 Amp तक Maximum रहता है जो की over लोड है। जिससे केवल एक फिडर चलाया जाता है शेष फिडर को

LM - Substation

Distance - 100 Mtr (11KV)

Feeders - 05 Nos

25 KV A TIA New proposed

को से सम्बन्धित प्रतिकूल राय है।

J. E. Mijajay

अधिशासी अभियन्ता
हसनगंज, उन्नाव

PROJECT ESTIMATE



MADHYANCHAL VIDYUT VITARAN NIGAM LTD.

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001

Ph No. 0522-2208737 GSTIN: 09AAECM0108J1ZO

Project Description : ASHWANI KUMAR (APP.NO-1008265841)

Project Code : MVDP.UN.PD4518

Estimate Value : 119,331.18

Estimate Printout Date : 04.05.2023


Previous Approved Version : N.A.

Fund (Project Code) : PTW_DEP0SI

SR. NO.	PARTICULARS	UNIT	QTY	RATE(RS.)	AMOUNT
	Material & Service-Lines&Cable - MVDP.UN.PD4518.A				
1	TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006	No	1.000	56,780.00	56,780.00
2	GAURDING CHANNEL (O/U) - 2700000425	No	2.000	744.00	1,488.00
3	STAY SET 16X1800 - 2700000131	No	3.000	2,027.00	6,081.00
4	A.C.S.R. WEASEL CONDUCTOR - 1000000028	M	350.000	23.99	8,396.50
5	11 KV STAY INSULATOR - 2700000097	No	3.000	150.00	450.00
6	TEE-OFF CHANNEL - 1800000012	No	1.000	478.00	478.00
7	HOLDING CLAMP FOR PCC POLE 8.5 MTR. 2500000002	No	12.000	304.00	3,648.00
8	SS BASE ANGLE - 1800000053	No	2.000	1,778.00	3,556.00
9	TOP CHANNEL - 1800000013	No	1.000	832.00	832.00
10	G.I.WIRE 10 SWG - 2700000005	KG	25.000	108.56	2,714.00
11	MS NUT & BOLT OFF SIZE 3X3' - 2500000096	KG	6.000	192.00	1,152.00
12	11KV COMP. POLY. DISC INSULATOR 45KN T&C - 2700000173	No	6.000	412.00	2,472.00
13	11KV F-CLAMP FOR PCC POLE - 2500000048	No	2.000	265.00	530.00
14	FUSE SET 11 KV - 2700000059	SET	1.000	1,167.00	1,167.00
15	CROSS BRACING M.S. ANGLE - 2700000148	SET	2.000	3,159.00	6,318.00
16	CROSS ARMS V-TYPE 11 KV - 1700000104	No	2.000	744.00	1,488.00
17	PCC POLE 8.5 MTR.LONG - 1500000000	No	4.000	2,721.00	10,884.00
18	EARTHING COMPLETE - 2700000150	No	4.000	838.00	3,352.00

19	DROPPER CHANNEL 100X50MM - 1800000007	No	1.000	748.00	748.00
20	11 KV COMPOSITE POLYMER PIN INSULATOR - 2700000193	No	6.000	268.00	1,608.00
Sub Total - Material (Rs.)					114,142.50
1	MATERIAL & MAINTENANCE - 1000001733	No	1.000	1.00	1.00
Sub Total - Services (Rs.)					1.00
Total - Material & Service-Lines&Cable - (Rs.)					114,143.50
T&P Charges - MVDP.UN.PD4518.Q					
1	T&P Charges				1,763.47
Sub Total - Charges (Rs.)					1,763.47
Total - T&P Charges - (Rs.)					1,763.47
Contingency Charges - MVDP.UN.PD4518.Z					
1	Contingency Charges				3,424.21
Sub Total - Charges (Rs.)					3,424.21
Total - Contingency Charges - (Rs.)					3,424.21
Total(Materials + Services + Charges) (Rs.)					119,331.18
Return Material - MVDP.UN.PD4518.A					
Grand Total (Rs.)					119,331.18

Amount in Words: One Lakh Nineteen Thousand Three Hundred Thirty One Rupees Eighteen Paise Only

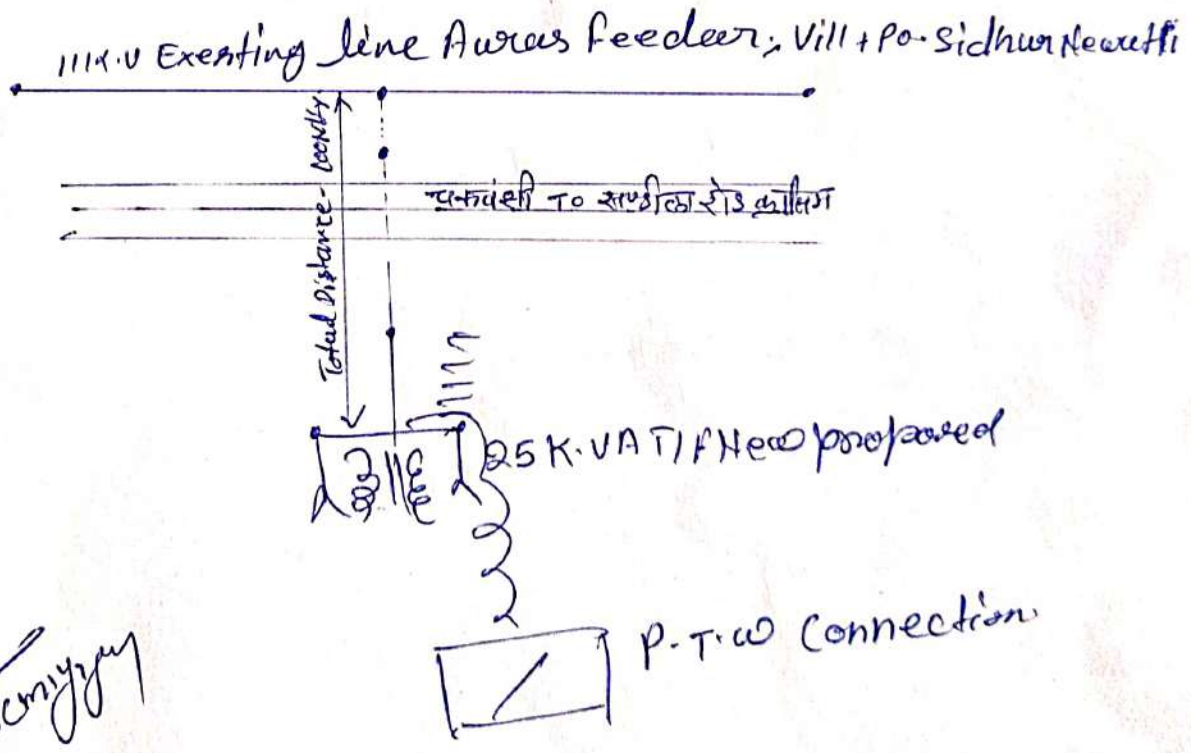

Handwritten signature

Handwritten signature


REPORT

MUDP-UN-PD4518

This Estimate Amounting to Rs.....00 only has been framed to cover the cost of construction To SRI ASHWANI KUMAR S/O SRI BAMBALAL Vill-P.O -SIDHUR NEWATI KHERA MO. NO.-9648609789 ,Block Miyaganj Unnao 33/11 KV S/S MIYAGANJ Unnao, 11KV Feeder-RASULABAD Under Deposit work of load 08 HP. vide PTW application No. 1008265841 ,DATE-26.04.2023. MO.NO. 9648609789

Rates provided in this estimate as per cost data book 2021-2022. & Direct supervision of SDO EDSD III Miyaganj, UNNAO after sanction of estimate.

LINE CHART

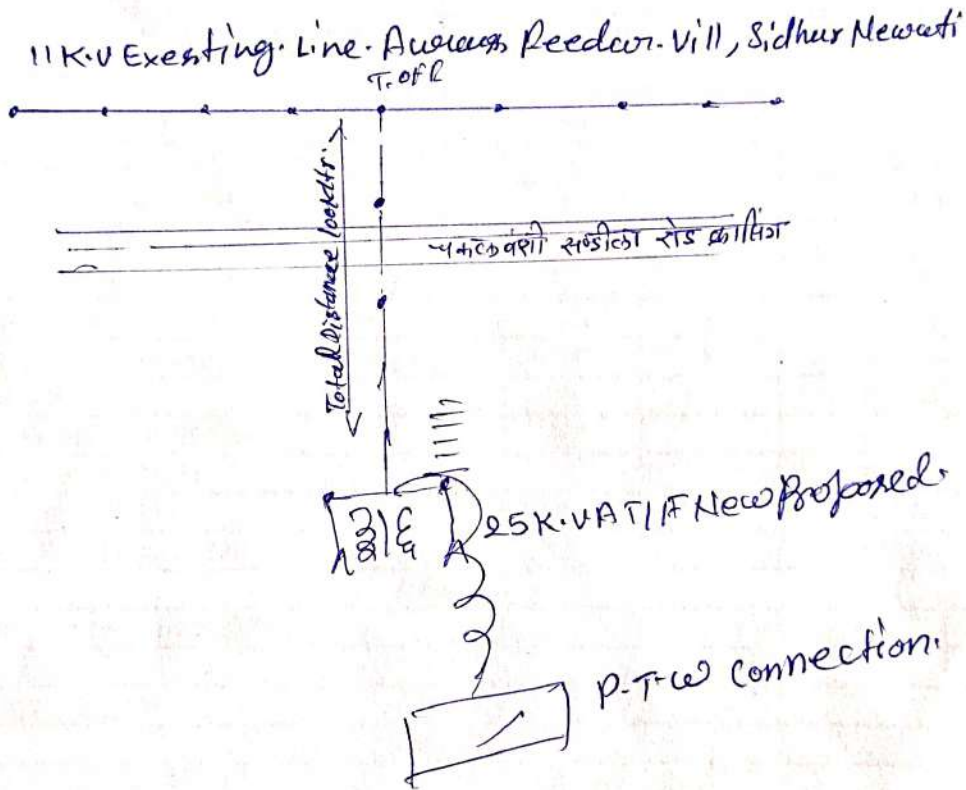

[Signature]
S.D.O.

Miyaganj

[Signature]
J.E.

Miyaganj