



Project Description

**PROJECT ESTIMATE**  
**MADHYANCHAL VIDYUT VITARAN NIGAM LTD.**

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001  
Ph No. 0522-2208737 GSTIN: 09AAECM0108JIZO

Project Code : MVDP.LK.PD6487  
Estimate Value : 98,100.75  
Estimate Printout Date : 08.06.2023  
Previous Approved Version : N.A.  
Fund (Project Code) : PTW\_DEPOSI

: NEW 5 H.P. PTW TO SRI KAUSAL JI SETH S/O SRI SANTOSH KUMAR SETH  
R/O GRANT

SR. NO.	PARTICULARS	UNIT	QTY	RATE(RS.)	AMOUNT
	<b>Material &amp; Service-Lines&amp;Cable - MVDP.LK.PD6487.A</b>				
1	G.I.WIRE 6 SWG - 2700000003	KG	4.500	64.66	290.97
2	11 KV COMPOSITE POLYMER PIN INSULATOR - 2700000193	No	6.000	268.00	1,608.00
3	DROPPER CHANNEL 100X50MM - 1800000007	No	1.000	748.00	748.00
4	11KV COMP. POLY. DISC INSULATOR 45KN T&C - 2700000173	No	6.000	412.00	2,472.00
5	11KV F-CLAMP FOR PCC POLE - 2500000048	No	1.000	265.00	265.00
6	HOLDING CLAMP FOR PCC POLE 8.5 MTR. - 2500000002	No	6.000	304.00	1,824.00
7	EARTH ROD 2540X20 MM - 1700000133	No	3.000	741.21	2,223.63
8	TEE-OFF CHANNEL - 1800000012	No	1.000	478.00	478.00
9	STAY SET 16X1800 - 2700000131	No	3.000	468.00	1,404.00
10	A.C.S.R. WEASEL CONDUCTOR - 1000000028	M	324.000	23.98	7,769.52
11	PCC POLE 8.5 MTR.LONG - 1500000000	No	3.000	2,721.00	8,163.00
12	11 KV STAY INSULATOR - 2700000097	No	3.000	922.09	2,766.27
13	M.S. ANGLE 65X65X6 M.M. - 1800000000	KG	24.000	148.20	3,556.80
14	STAY WIRE 7/10 SWG - 2700000071	KG	13.500	73.98	998.73
15	STAY CLAMP 5½" - 2500000034	PAA	3.000	304.00	912.00
16	TOP CHANNEL - 1800000013	No	1.000	832.00	832.00
17	11 KV V-TYPE STEEL CROSS-ARM 65X65X6 MM - 2700000161	No	1.000	744.00	744.00
	<b>Sub Total - Material (Rs.)</b>				<b>37,055.92</b>

Total - Material & Service-Lines&Cable - (Rs.)				37,055.92
Material & Service-Plant&Machinery - MVDP.LK.PD6487.B				
1	TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006	No	1.000	56,780.00 / 56,780.00
Sub Total - Material (Rs.)				56,780.00
Total - Material & Service-Plant&Machinery - (Rs.)				56,780.00
T&P Charges - MVDP.LK.PD6487.Q				
1	T&P Charges			
Sub Total - Charges (Rs.)				1,449.76
Total - T&P Charges - (Rs.)				1,449.76
Contingency Charges - MVDP.LK.PD6487.Z				
1	Contingency Charges			
Sub Total - Charges (Rs.)				2,815.07
Total - Contingency Charges - (Rs.)				2,815.07
Total(Materials + Services + Charges) (Rs.)				2,815.07
Return Material - MVDP.LK.PD6487.A				
Grand Total (Rs.)				98,100.75

Amount in Words: Ninety Eight Thousand One Hundred Rupees Seventy Five Paise Only


*[Signature]*  
 ( Jr Engineer - E&M )  
 Rohit Kumar Gautam  
 11003692  
 APPROVED - 08.06.2023

*[Signature]*  
 ( Asst. Engineer - E&M )  
 Neelakch Manosh  
 11003686

3000101 = 60  
 3000101 एजाए एक साँ एक को भात  
 year 23-24  
 09-06-23

T/Asst

EX 237  
*[Signature]*  
 EX ENG

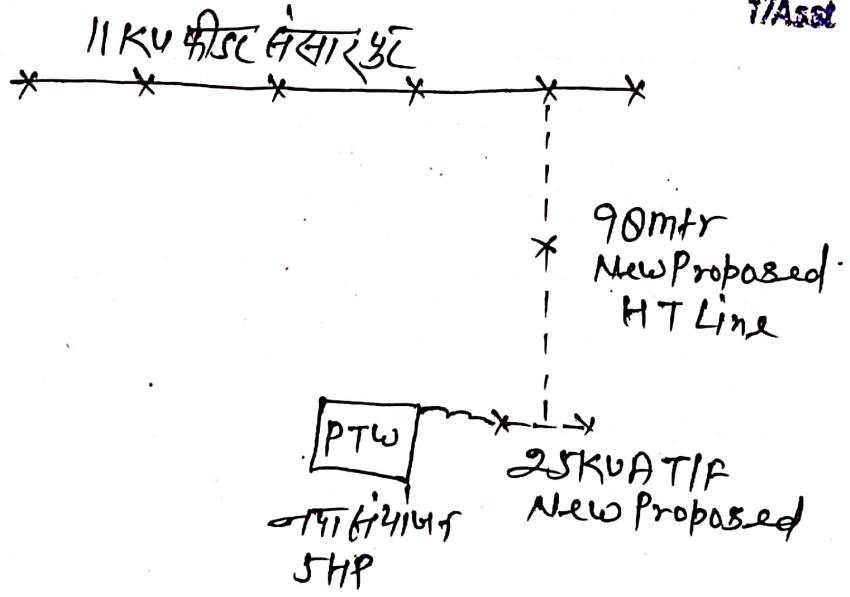

*[Signature]*