



कार्यालय अधिशासी अभियन्ता,
पश्चिमांचल विद्युत वितरण निगम लि०,
विद्युत वितरण खण्ड
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 726 / विविखचं / तक०
विषय- धनराशि जमा करने के सम्बन्ध में।

दिनांक 5-8-2023

श्री कुवंरपाल पुत्र श्री रामदास
पता/साईट-गाटा सं० 340, रूदायन,
ब्लाक-पवांसा।

मो०नं०- 9761169078

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008307349 दिनांक 28/07/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	(S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	111574.00
	कुल योग	119531.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।

अधिशासी अभियन्ता

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.

Electricity Distribution Division CHANDAUSI

ESTIMATE PTW.

0

Sanction Pro.Fee R.NO. 1008309349 Pro.Fee Amount 100.00
Date 28.07.2023 Scheme Deposit

Estimate framed by SDO II ESDS-II CHANDAUSI
For giving supply to Sh. KUNWAR PAL S/O SH. RAM DASS
Village RUDAYAN P.O PAWANSA
Block PAWANSA Distt. Sambhal

AMOUNT

Load	10	HP. Ptw. Process .		
1.11KV Line	72	Mtr. on Pcc supports @Rs. 236	per mtr.	Rs. 16992.00
2.LT Line3Ph	0	Mtr.. on Pcc supports @Rs. 200	per mtr.	Rs. 0.00
3.Extra cost of HT connection with HT line or Toff from HT line				Rs.
4.Extra cost of HT connection with S/S				Rs.
5.Extra cost of LT connection with LT main line				Rs.
6.Extra cost of LT connection with upto 25KVA S/S		COST OF 25 Kva S/S		Rs. 94582.00
7.Extra cost for terminal pole fitting				Rs.
8.Extra cost for Road / Telephone line Crossing for HT line				Rs.
9.HT line / LT line Inspection fee				Rs.

Total-Rs. 111574.00

10.Length of line ch.to Corporation..... Meters

11.Length of line ch.to Consumer..... Meters

(Beyond free Limit of 190 meters)

Total Meters

Ch.to Crop. / PC

12.(a)11/0.4KV S/S.....KVA vide Schedule No. Ch. To PC

Rs. 4957.00

13.Electric Inspection of T/F

Rs.

14.System Loading charges

Rs.

15.Fixed charges

Rs.

The HT Line/LT Line will be tapped from NARANG fdr. S/S in Vill. RUDAYAN
Connection from 33/11KV S/S at KHIRNI

Certified that the cosing of work involved has been done according to standard schedule framed in division
On current stock issue rate.

(line chart on its back)

Sanctioned Amount forRs. 116531.00

S No. 1270/518/23 for financial year 22-23

Classified as under :

- (a) Ch. To board
 - (i) Transmission Rs.
 - (ii) Transformation Rs. 116531=00
 - (iii) Distribution Rs. Am. Sanctioned For Rs. One One Six
- (b) Ch. To Consumer
 - (i) Transmission Rs. Rs. Five three One.
 - (ii) Transformation Rs. Sanction No. & Date
 - (iii) Distribution Rs. Ch. To Deptt. Rs. Will

Checked by

Drafts Man

J.E.

S.D.O

D.A(W)

Ex. Engr.
Elect. Distr Divion
Chandausi
Executive Engineer

Proposed line chart to give connection Shri

KUNWAR PAL

S/O SH.

BHARAT


VILL.

RUDAYAN

P.O PAWANSA

Distt.Sambhal

DETAIL LINE CHART

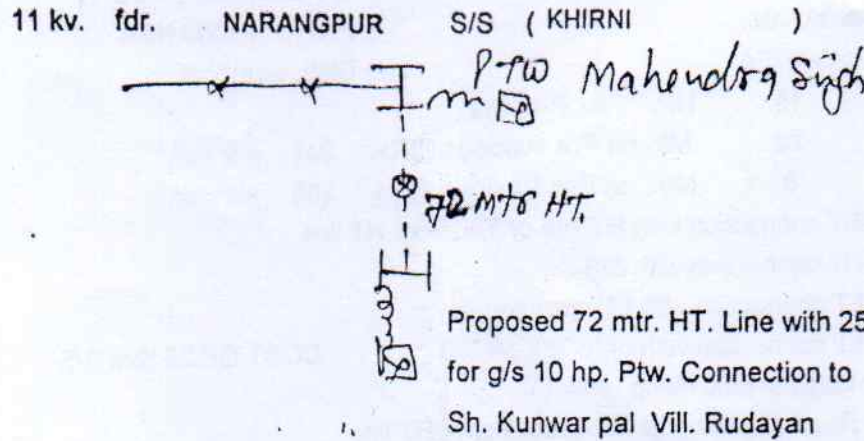

VOLTAGE DROP :-

Surveyed by shri

URMAAN SINGH LM.

(A) List of Material

(B) Details

01.Pcc Pole	NO.	3.00	1.Length of Live (a)HT.	72	MTR
02. ACSR Weasel con.	MTR.	232.00	(b)LT.	0	MTR
03. Stay Rod 16x1800mm	NO.	3.00	2.Existing capacity of S/S	0	KVA
04. Stay Wire 7/10 SWG	KG.	15.00	3.Existing Load	0	HP
05. Earthing rod	NO.	2.00	4.Proposed Load	10	HP
06. 11kv disc Insulator	NO.	6.00	5.Proposed capacity of S/S	25	KVA
07. 11 kv disc fitting	NO.	6.00			
08. 11 kv pin Insulator	NO.	6.00			
09. 11 kv pin with Nut	NO.	6.00			
10. 11 kv x-arm v- type	NO.	1.00			
11. M.S.channel 100x50x6mm	KG.	44.00			
12. M.S.angle 65x65x6mm	KG.	26.00			
13. 11/0.4kv 25 kva T/F	NO.	1.00			

Proposed By

Junior Engineer

Sub Divisional Officer

Scanned by CamScanner

G/S TO SH.

KUNWAR PAL

S/O SH. RAM DASS

VILL. RUDAYAN

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.

JOB CARD

PTW Deposit

(A) HT. LINE
(B) LT. LINE

72
0

MTR. (C) NEW S/S 25 KVA W/O NO. & DATE
MTR. (D) INCREASING CAPTY. KVA TO

STARTING DATE
KVA COMPLETION DATE

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	NET QTY. ISSUED
				ORIGINAL	REVISED					
1	Pcc Pole 8.5 mtr. long	H0000557	01	NO.	3					
2	ACSR Weasel cond.	H300909	10	MTR..	232					
3	Stay Rod 16x1800 mm		10	NO.	3					
4	Stay Wire 7/10 SWG		07	KG.	15					
5	Earthing rod		07	NO.	2					
6	11kv Disc Insulator		01	NO.	6					
7	11kv Disc Fitting		01	NO.	6					
8	11kv Pin Insulator		15	NO.	6					
9	11kv Pin with Nut		01	NO.	6					
10	11kv X-Arm V Type		01	NO.	1					
11	M.S. Channel 100X50x6 mm		09	KG.	44					
12	M.S. Angle 65x65x6 mm		01	KG.	26					
13	11/0.4 kv 25 kva T/F			NO.	1					
14										
15										

Handwritten signatures and initials in blue ink.

NAME OF ESTIMATE

ESTIMATE NO.

FIELD SUB DIV. NAME

P.T.O