

MUDP-UN-PD5178



कार्यालय अधिशासी अभियन्ता
विद्युत वितरण खण्ड पंचम
हसनगंज, उन्नाव

Email :- edd5.unnao@gmail.com
Mo. 9415099135

पत्रांक 5402 / वि0वि0ख0ह0उ0 / तकनीकी आख्या दिनांक : 01.08.2023
विषय : 08 एच0पी0 निजी नलकूप विद्युत संयोजन हेतु तकनीकी आख्या प्रेषित करने के सम्बन्ध में।

उपखण्ड अधिकारी
विद्युत वितरण उपखण्ड
मियागंज - उन्नाव

आवेदन संख्या:-1008308977
दिनांक:-01/08/2023

श्री नवल किशोर पुत्र श्री विशम्भर दयाल ग्राम व पो0 अरियर कलां
वि0ख0-मियागंज, तहसील-हसनगंज, जिला-उन्नाव, मो0- 8957323324 द्वारा 08 एच0पी0
निजी नलकूप विद्युत संयोजन हेतु आवेदन किया गया है।
कृपया उपरोक्त विद्युत संयोजन हेतु तकनीकी आख्या निम्नांकित बिन्दुओं सहित प्रेषित करें:-
परिसर पर पूर्व में विद्युत संयोजन एवं विद्युत बकाए की स्थिति।

- 01 विद्युत संयोजन एल0टी0 लाइन से प्रस्तावित है अथवा नया ट्रान्सफार्मर प्रस्तावित है।
- 02 यदि संयोजन एल0टी0 से प्रस्तावित है तो पोषित ट्रान्सफार्मर की क्षमता एवं उसके पोषित भार का विवरण
- 03 संस्तुति।
- 04 लाइन चार्ट।

अधिशासी अभियन्ता
हसनगंज, उन्नाव

पत्रांक 5402 / वि0वि0ख0ह0उ0 / तकनीकी आख्या दिनांक 01.08.2023
प्रतिलिपि अवर अभियन्ता 33/11 के0वी0 सबस्टेशन- मियागंज, उन्नाव को सूचानार्थ एवं
आवश्यक कार्यवाही हेतु प्रेषित।

L.M. Sarver
Total Distance- 550 Meter
Feeder - Rusulabad
25KVA TIF New Proposed
कन0से सम्बन्धित प्रस्तावित संकेत है।
01/08/2023
J-E Miyagang


अधिशासी अभियन्ता
हसनगंज, उन्नाव

REPORT

This Estimate Amounting to Rs.....00 only has been framed to cover the cost of construction To SRI NAVAL KISHOR S/O SRI VISHAMBHAR DAYAL Vill+P.O - ARIYAR KAL MO. NO.-8957323324 Block Miyaganj Unnao 33/11 KV S/S MIYAGANJ Unnao, 11KV Feeder- RASULABAD Under Deposit work of load 08 HP. vide PTW application No. 1008308977,DATE:-01.08.2023. MO.NO. -8957323324

Rates provided in this estimate as per cost data book 2022-2023. & Direct supervision of SDO ESDS III Miyaganj, UNNAO after sanction of estimate.

LINE CHART

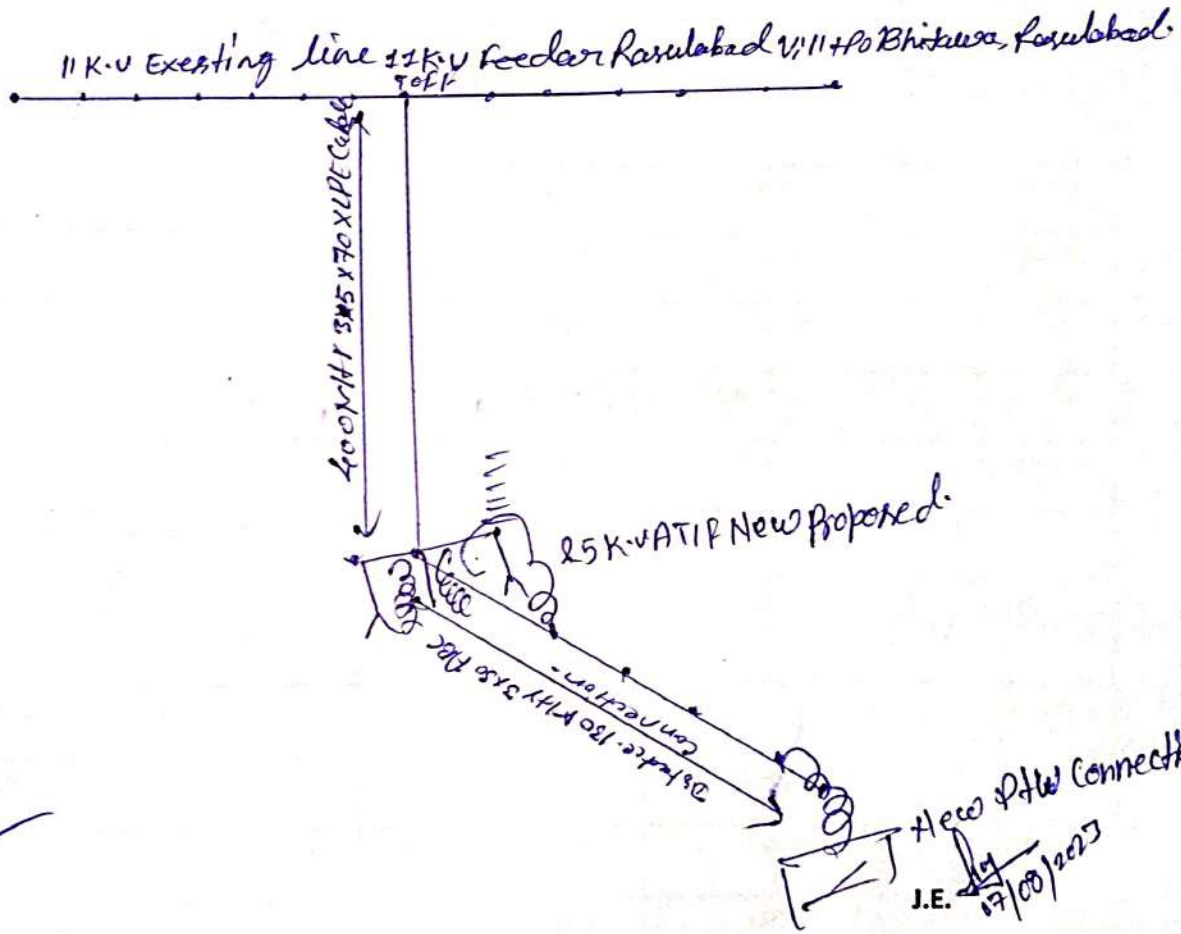

Jamal
S.D.O.

Miyaganj

Miyaganj



PROJECT ESTIMATE

MADHYANCHAL VIDYUT VITARAN NIGAM LTD.

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001

Ph No. 0522-2208737 GSTIN: 09AAECM0108J1ZO

Project Description : NAVAL KISHOR(MO.NO-8957323324)

Project Code : MVDP.UN.PD5178

Estimate Value : 462,627.36

Estimate Printout Date : 06.08.2023


Previous Approved Version : N.A.

Fund (Project Code) : PTW_DEPOSI

SR. NO.	PARTICULARS	UNIT	QTY	RATE(RS.)	AMOUNT
	Material & Service-Lines&Cable - MVDP.UN.PD5178.A				
1	DEAD END CLAMP - 2500000051	No	1.000	150.00	150.00
2	EARTHING COMPLETE - 2700000150	No	2.000	838.00	1,676.00
3	SS BASE ANGLE - 1800000053	No	2.000	1,778.00	3,556.00
4	STAY SET 16X1800 - 2700000131	No	2.000	2,027.00	4,054.00
5	G.I.WIRE 10 SWG - 2700000005	KG	10.000	108.56	1,085.60
6	CABLE H.T.XLPE 11 KV 3X70 SQ.MM. - 1000000005	M	430.000	735.00	316,050.00
7	11 KV COMPOSITE POLYMER PIN INSULATOR - 2700000193	No	6.000	268.00	1,608.00
8	CABLE BOX O/D 11 KV 3X70 XLPE - 2300000021	No	2.000	4,165.00	8,330.00
9	SUSPENSION CLAMP - 2500000133	No	3.000	150.00	450.00
10	EYE-HOOK - 2200000014	No	3.000	150.00	450.00
11	11 KV STAY INSULATOR - 2700000097	No	2.000	150.00	300.00
12	TEE-OFF CHANNEL - 1800000012	No	1.000	478.00	478.00
13	HOLDING CLAMP FOR PCC POLE 8.5 MTR. - 2500000002	No	5.000	304.00	1,520.00
14	TOP CHANNEL - 1800000013	No	1.000	832.00	832.00
15	L.T.M.S.CLAMP FOR PCC POLE - 2500000009	No	3.000	304.00	912.00
16	PCC POLE 8.5 MTR.LONG - 1500000000	No	5.000	2,721.00	13,605.00
17	FUSE SET 11 KV - 2700000059	SET	1.000	1,167.00	1,167.00
18	ABC (3X50 + 1X35 + 1X16) SQ.MM - 2200000012	KM	130.000	221.25	28,762.50

19	DROPPER CHANNEL 100X50MM - 1800000007	No	1.000	748.00	748.00
20	TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006	No	1.000	56,780.00	56,780.00
Sub Total - Material (Rs.)					442,514.10
1	REPAIRING & MAINTENANCE- LINES CABLES - 1000001733	No	1.000	1.00	1.00
Sub Total - Services (Rs.)					1.00
Total - Material & Service-Lines&Cable - (Rs.)					442,515.10
T&P Charges - MVDP.UN.PD5178.Q					
1	T&P Charges				6,836.84
Sub Total - Charges (Rs.)					6,836.84
Total - T&P Charges - (Rs.)					6,836.84
Contingency Charges - MVDP.UN.PD5178.Z					
1	Contingency Charges				13,275.42
Sub Total - Charges (Rs.)					13,275.42
Total - Contingency Charges - (Rs.)					13,275.42
Total(Materials + Services + Charges) (Rs.)					462,627.36
Return Material - MVDP.UN.PD5178.A					
Grand Total (Rs.)					462,627.36

Amount in Words: Four Lakh Sixty Two Thousand Six Hundred Twenty Seven Rupees Thirty Six Paise Only

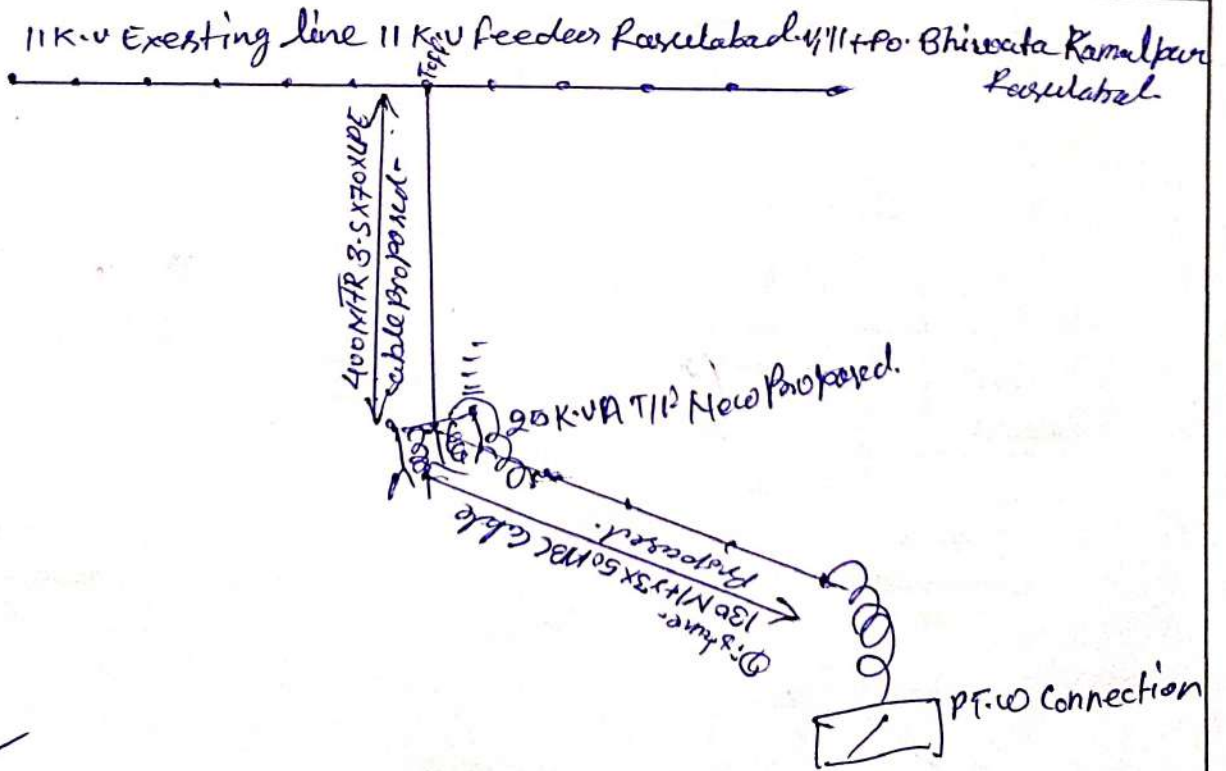

Handwritten signature

4/8/2023
T. E. Miyajagi