



कार्यालय अधिशासी अभियन्ता,  
पश्चिमांचल विद्युत वितरण निगम लि०,  
विद्युत वितरण खण्ड  
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 8926 /विविखचं/तक०  
विषय-धनराशि जमा करने के सम्बन्ध में।

दिनांक 12/9/23

श्री रामगोपाल पुत्र श्री रोहन  
पता/साईट-गाटा सं० 2193, रसूलपुर धतरा,  
ब्लाक-पवांसा।

मो०नं०- 9897237640

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008320689 दिनांक 05/09/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	( S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	98122.00
	कुल योग	106079.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रूपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।

  
अधिशासी अभियन्ता

ESTIMATE PTW.

0

Sanction Pro.Fee R.NO. 1008320689 Pro.Fee Amount 100.00  
Date 05.09.23 Scheme Deposit

Estimate framed by SDO II EDSD-II CHANDAUSI  
For giving supply to Sh. RAMGOPAL S/O SH. ROHAN  
Village RASOOLPUR DHATRA P.O PAWANSA  
Block PAWANSA Distt. Sambhal

AMOUNT

Load	10	HP. Ptw. Process .			
1.11KV Line	15	Mtr. on Pcc supports @Rs.	236	per mtr.	Rs. 3540.00 ✓
2.LT Line3Ph	0	Mtr.. on Pcc supports @Rs.	200	per mtr.	Rs. 0.00
3.Extra cost of HT connection with HT line or Toff from HT line					Rs.
4.Extra cost of HT connection with S/S					Rs.
5.Extra cost of LT connection with LT main line.					Rs.
6.Extra cost of LT connection with upto 25KVA S/S				COST OF 25 Kva S/S	Rs. 94582.00 ✓
7.Extra cost for terminal pole fitting					Rs.
8.Extra cost for Road / Telephone line Crossing for HT line					Rs.
9.HT line / LT line Inspection fee					Rs.

Total-Rs.

98122.00

10.Length of line ch.to Corporation.....Meters

11.Length of line ch.to Consumer.....Meters

(Beyond free Limit of 190 meters)

Total .....Meters

Ch.to Crop. / PC

12.(a)11/0.4KV S/S.....KVA vide Schedule No. .... Ch. To PC

Rs. 4957.00 ✓

13.Electric Inspection of T/F

Rs.

14.System Loading charges

Rs.

15.Fixed charges

Rs.

The HT Line/LT Line will be tapped from  
Connection from 33/11KV S/S at KHIRNI

AJHRA fdr. S/S in Vill. RASOOLPUR DHATRA

Certified that the cosing of work involved has been done according to standard schedule framed in division  
On current stock issue rate.

( line chart on its back)

Sanctioned Amount forRs. 103079.00 ✓

S No. 1386 for financial year 22-23

Classified as under :

- (a) Ch. To board
  - (i) Transmission Rs. 103079=00
  - (ii) Transformation Rs. Amt Sanctioned For Rs. 041200
  - (iii) Distribution Rs. Rs. 41200
- (b) Ch. To Consumer
  - (i) Transmission Rs. Sanction No. & Date 1386 11-9-23
  - (ii) Transformation Rs. Ch To. Deptt. Rs. Nil
  - (iii) Distribution Rs. Ch To P.G. Rs. 103079=00

Checked by

Drafts Man

J.E.

S.D.O


D.A(W)

Executive Engineer

Ex. Engr.  
Elect. Distr Divio  
Chancausi

**DETAIL LINE CHART**

11 kv. fdr. **AJHRA Mainli S/S ( KHIRNI )**

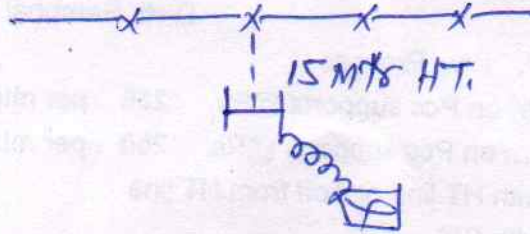

Proposed 15 mtr. HT. Line with 25 kva s/s  
 for g/s 10 hp. Ptw. Connection to  
Sh. Ramgopal V- Rasoolpur dhtra

**VOLTAGE DROP :-**

Surveyed by shri

**NONIHAL LM.**

(A) List of Material

(B) Details

01. Pcc Pole	NO.	2.00
02. ACSR Weasel con.	MTR.	57.00
03. Stay Rod 16x1800mm	NO.	3.00
04. Stay Wire 7/10 SWG	KG.	15.00
05. Earthing rod	NO.	2.00
06. 11kv disc Insulator	NO.	6.00
07. 11 kv disc fitting	NO.	6.00
08. 11 kv pin Insulator	NO.	3.00
09. 11 kv pin with Nut	NO.	3.00
10. 11 kv x-arm v- type	NO.	0.00
11. M.S. channel 100x50x6mm	KG.	44.00
12. M.S. angle 65x65x6mm	KG.	26.00
13. 11/0.4kv 25 kva T/F	NO.	1.00

1. Length of Live (a) HT.	15	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By

**Junior Engineer**

**Sub Divisional Officer**

G/S TO SH.

RANGOPAL

S/O SH. ROHAN

VILL. RASOOLPUR DHATRA

**PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.  
JOB CARD**

PTW Deposit

(A) HT. LINE 15 MTR. (C) NEW S/S 25 KVA W/O NO & DATE ..... STARTING DATE  
(B) LT. LINE 0 MTR. (D) INCREASING CAPTY. KVA TO ..... KVA COMPLETION DATE

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.	NET QTY. ISSUED
				ORIGINAL	REVISED					
1	Pcc Pole 8.5 mtr. long	H000557	01	NO.	2					
2	ACSR Weasel cond.	H300909	10	MTR..	57					
3	Stay Rod 16x1800 mm		10	NO.	3					
4	Stay Wire 7/10 SWG		07	KG.	15					
5	Earthing rod		07	NO.	2					
6	11kv Disc Insulator		01	NO.	6					
7	11kv Disc Fitting		01	NO.	6					
8	11kv Pin Insulator		15	NO.	3					
9	11kv Pin with Nut		01	NO.	3					
10	11kv X-Arm V Type		01	NO.	0					
11	M.S. Channel 100X50x6 mm		09	KG.	44					
12	M.S. Angle 65x65x6 mm		01	KG.	26					
13	11/0.4 kv 25 kva T/F			NO.	1					
14										
15										

*(Handwritten initials/signature)*

NAME OF ESTIMATE

ESTIMATE NO. ....

FIELD SUB DIV. NAME

P.T.O