

Electricity Distribution Division Chhibramau

1. Abstract For PTW Set Connection

Name & Address of consumer Shri/Smt MANGLI PRASAD C/O/
S/o ,W/O, Shri/Late RAM SANEHI Name of Village . POHAPPUR Post ...
POHAPPUR..... Block ...Saurikh... Dist Kannauj.... Load Sanction.....13..... H.P.....
Sanction number.....299../8460.....Date.....09../...09../...2023.....
Prosec's PTW Length Of Line HT...50.....Mtrs LT Mtrs Name of Scheme
..... **Deposit** Proposed **13 HP S/S** 25 KVA

1. Chargeable to consumer :-

(a) Fixed Charges for Type Service T/F

(i) H.T. Line...50x236.. @permtr. Charge

(i i) Meter Cost @

Rs..... **.94582.00**

Rs.....**11800.00**

Rs.....**4957.00**

Total :- ... Rs...**111339.00**

Certificate :-

Certificate that the connection is beyond the command area pf STW Pump Canal and is technically feasis :-

(i) Nearest distance from existing PTW/Set Electric Diesel PTW

(ii) Name of Feeder 11 KV.....

(iii) Name Of Sub Station 33/11 KV S/S.....

(iv) To the best of my knowledge it is not same porting case new

Abstract for T.C.

Ch . To consumer Rs.....**111339.00** ..

Ch. To Board Rs..... **0.00**...

Total Rs.....**111339.00**.....

Detailed Estimate

Sanction No ...**DO**...../2022-23

Ch. To consumer Rs.....**111339.00**..

Ch. To Board Rs.....**0.00**...

G.Total Rs.....**111339.00**...

Checked
D/MAN

Checked

Sanctioned
Executive Engineer



Estimate for Giving

Smt/Sri : MANGLI PRASAD

R/o : ... POHAPPUR

Transformation

13HP P.T.W . Connection to

S/O : RAM SANEHI


Post:- POHAPPUR

25 KVA S/S with D/P

S.NO	Name of Particular	Unit	Quantity	Rate	Amount
1	Pcc pole 8.5 mtr long	No	02	2721.00	5442.00
2	Stone pad	No	02	140.00	280.00
3	Top channel 100*50*2240 m.m	No	01	832.00	832.00
4	Dropper channel 100*50*1300 m.m	No	01	748.00	748.00
5	T/f Base Angle 75*75*6 * 2028 m.m	No	02	1778.00	3556.00
6	11 KV Disc Insulator with G.I Pin	No	03	264.00	792.00
7	11 KV Pin Insulator with G.I Pin	No	03	123.00	369.00
8	11/0.4 Kv 25 KVA T/F	No	01	56780.00	56780.00
9	11 KV TPMO	No	01	18292.00	18292.00
10	Danger Board With Clamp	No	01	461.00	461.00
11	Stay Rod Complete	No	01	2027.00	2027.00
12	Earthing Rod	No	02	838.00	1676.00
13	Holding Clamp for top dropper TPm . Etc	No	11	259.00	2849.00
14	"T" Off Channel 100*50*1300 mm	No	01	478.00	478.00
15	Bolt Or Nut	No	0	196.00	0.00
	Total				94582.00

CLB
W/m
S.D.O

J.E

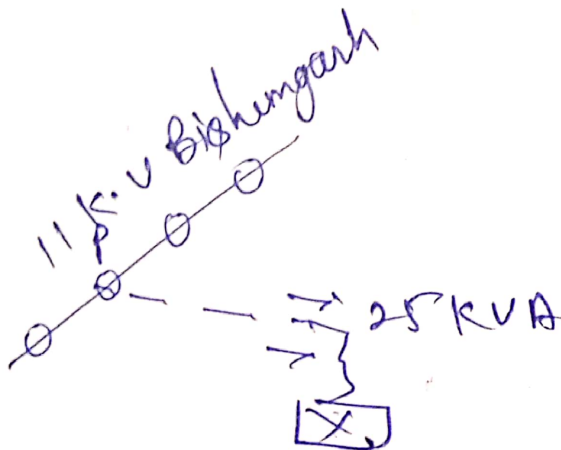

33/11 K.V
Seepur
S/S



Estimate for Giving

TO

Shri/Smt : MANGLI PRASAD

R/O :- POHAPPUR

Transformation.....

13HP P.T W CONNECTION

S/o Shri: RAM SANEHI

Post :- POHAPPUR

H.T.line 50Mtrs.....

S.no	Name of particular	Unit	Quantity	Rare	Amount
1	PCC Pole 8.5 mtr long	No	01	2721.00	2721.00
2	Concreting of Pole	No	01	856.00	856.00
3	X-Arm Holding Clamp for PCC	No	01	304.00	304.00
4	11KV "V" Type X-arm 65*65*6m.m	No	01	744.00	744.00
5	11 KV F Clam for PCC	No	01	265.00	265.00
6	11 kv pin insulator with G.I.Pin	No	03	123.00	369.00
7	11 Kv Disc insulator With disc Fitting	No	03	264.00	792.00
8	ACSR weasel Conductor 50x 3 + 3%	Mtr	155	23.98	3716.90
9	Stay Rod Complete	No	01	2027.00	2027.00
10	Earthing Rod	No	0	838.00	0.00
11	"T" off channel with clump 100*50*1300m.m	No	0	478.00	0.00
16	Bolt & Nut	kg	0	196.00	0.00
17	Cartage* Labour (provide by consumer)	Km	05		0.00
	Total				11794.90
	G Total				11794.90

C/S




JE