

Electricity Distribution Division Chhibramau
Abstract For PTW Set Connection

Against Application No.

Name & Address of consumer Shri/Smt..... **Surendra Singh Yadav**

C/O/S/o,W/o,Shri/Late.....**Geetam Singh**..... Name of Village.....**Malikpur**.....

Post..... **Sandhan**..... Block..... **Talgram**..... Dis..... **Kannauj**.....

Load Sanction .. 13 00..... HP ..Sanction... **8601**..... Date **8:09:23**..

Prosec's...PTW... Lenth of Line..... H.T..... **55**..... Mtrs. L.T..... Mtrs.....

Name of Scheme..... Deposit..... Proposed ..13 00 HP... S/S..... **25.KVA**.....

1	Chargeable to consumer :-	
	(a) Fixed Chages for Type service/T/F	Rs.....94582.00
	(i)H.T.Line ..55.. X..... @per mtr. Charge	Rs.....12980.00
	(ii) Meter Cost @	Rs.....4957.00
		Total:-... ..112519.00

Certificate :-

Certificate that the connection is beyond the command area of STW Pump canal and is technically feast :-

- Nearest distance from existing PTW/Set Electric Diesel PTW
- Name of feeder 11 KV.....**Ramashram - PTW**
- Name of Sub Station 33/11 KV S/S.....**Ramashram**
- To the best of my knowledge it is not same porjing case New

Abstract for T.C.

Ch. To consumer Rs.....**112519.00** ...

Ch. To Board Rs..... **0.00**.....

Total RS.....**112519.00**.....

Detailed Estimate

Sanction No...**D0**...../2023-24.....

Ch. To consumer Rs... **112519.00**.....

Ch. To Board Rs..... **0.00**.....

G.Total Rs.....**112519.00**.....

Checked
DIMAN

Checked

Sanctioned
Executive Engineer

Estimate For Giving

13.00 HP P.T.W. CONNECTION TO

By: Surendra Singh Yadav

1/o Sri Geetam Singh

Vill - Malikpur

Post - Samdhan


Transformation.....

H.T. Line.....55 Mtrs.....

S.No.	Name of Particular	Unit	Quantity	Rate	Amount
1	PCC Pole 8.5 mtr Long	No	01	2221.00	2221.00
2	Concreting of Pole	No	0	856.00	0.00
3	X-Arm Holding clamp for pcc	No	01	304.00	304.00
4	11 K.V.A. Type X Arm 65x65x6m m	No.	01	744.00	744.00
5	11 K.V.A. F. Clamp for pcc.	No.	01	265.00	265.00
6	11kv Pin Insulator with G.I. Pin	No.	03	123.00	369.00
7	11kv Disc Insulator with disc fitting	No.	03	264.00	792.00
8	ACSR weasel Conductor	Mtr.	170	23.98	4076.60
9	Stay Rod Complete	No	01	2027.00	2027.00
10	Earthing Rod	No.	01	838.00	838.00
11	T off Channel 100x50x1300m m.	No.	01	478.00	478.00
12	Bolt & Nut	Kg	01	196.00	196.00
13	Cartage & Labour (Provide By Consumer)	Km	0		0.00
				Total	12810.60
				G.Total	12811.00

Says. Rs.

LINE CHART

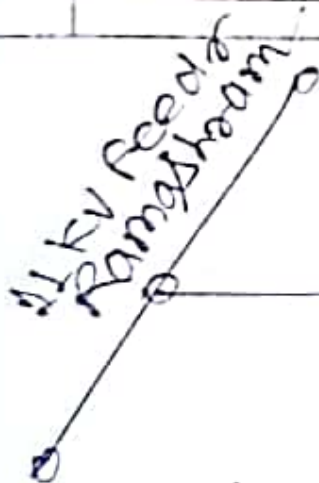

25 KV ATIA

Sri-Surendra Singh
Vill- malik Pur

S.D.P.

(Signature)
J.E.

Estimate For Giving

to. Surendra Singh Yadav

No - Malikpur

13.00 HP P.T.W. CONNECTION TO

S/o Sri Geetam Singh


Post - Samdhan

Transformation

25 KVA S/S With D/P

S No.	Name of Particular	Unit	Quantity	Rate	Amount
1	PCC Pole 8.5 mtr Long	No.	02	2721.00	5442.00
2	Stone Pad	No.	02	140.00	280.00
3	Top Channel 100x50x2240m m.	No.	1	832.00	832.00
4	Droper Channel 100x50x2028m m.	No.	1	748.00	748.00
5	"T" off Channel 100x50x1300m.m.	No.	1	478.00	478.00
6	T/F Base Angle 75x75x6x2028m m.	No.	2	1778.00	3556.00
7	11kv Disc Insulator with disc fitting	No.	3	264.00	792.00
8	11kv Pin Insulator with G.I. Pin	No.	3	123.00	369.00
9	11/0.4 KV 25 KVAT/F	No.	1	56780.00	56780.00
10	11 KV TPMS	No.	1	18292.00	18292.00
11	Danger Board With Clamp	No.	1	461.00	461.00
12	Stay Rod Complete	No.	1	2027.00	2027.00
13	Earthing Rod	No.	2	838.00	1676.00
14	Holding Clamp for top dropper TP m etc	No.	11	259.00	2849.00
Total					94582.00

S.D.O.


I.E.