



कार्यालय अधिशासी अभियन्ता,  
पश्चिमांचल विद्युत वितरण निगम लि०,  
विद्युत वितरण खण्ड  
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 11310 /विविखचं/तक०  
विषय-धनराशि जमा करने के सम्बन्ध में।

दिनांक 7-11-2023

श्रीमति ओमवती पत्नी श्री रामपाल  
पता/साईट-गाटा सं० 869, मल्लाह मुस्तफाबाद,  
ब्लाक-पवांसा।

मो०नं०- 9012444158

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008337270 दिनांक 28/10/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	( S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	100482.00
	कुल योग	108439.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।

  
अधिशासी अभियन्ता

ESTIMATE PTW.

0

Sanction	Pro.Fee R.NO.	1008337270	Pro.Fee Amount	100.00	
			Date	27.10.2023	Scheme Deposit
Estimate framed by	SDO II	EDSD-II	CHANDAUSI		
For giving supply to Sh.	OMWATI		S/O SH. RAMPAL		
Village	MALLAH MUSHTAFA BAD		P.O KHAS		
Block	PAWANSA		Distt. Sambhal		AMOUNT
Load	10	HP. Ptw. Process .			
1.11KV Line	25	Mtr. on Pcc supports @Rs.	236 per mtr.	Rs.	5900.00 ✓
2.LT Line3Ph	0	Mtr.. on Pcc supports @Rs.	200 per mtr.	Rs.	0.00
3.Extra cost of HT connection with HT line or Toff from HT line				Rs.	
4.Extra cost of HT connection with S/S				Rs.	
5.Extra cost of LT connection with LT main line				Rs.	
6.Extra cost of LT connection with upto 25KVA S/S			COST OF 25 Kva S/S	Rs.	94582.00
7.Extra cost for terminal pole fitting				Rs.	
8.Extra cost for Road / Telephone line Crossing for HT line				Rs.	
9.HT line / LT line Inspection fee				Rs.	
			<b>Total-Rs.</b>		<b>100482.00</b>
10.Length of line ch.to Corporation.....	Meters				
11.Length of line ch.to Consumer.....	Meters				
<b>(Beyond free Limit of 190 meters)</b>					
Total .....	Meters				Ch.to Crop. / PC
12.(a)11/0.4KV S/S.....	KVA vide Schedule No.	.....	Ch. To PC	Rs.	4957.00 ✓
13.Electric Inspection of T/F				Rs.	
14.System Loading charges				Rs.	
15.Fixed charges				Rs.	

The HT Line/LT Line will be tapped from NARANG fdr. S/S in Vill. MALLAH MUSHTAFA BA  
 Connection from 33/11KV S/S at KHIRNI

Certified that the cosing of work involved has been done according to standard schedule framed in division  
 On current stock issue rate.

( line chart on its back)

Sanctioned Amount forRs. 105439.00 ✓  
 S No. for financial year 23-24

Classified as under :

- (a) Ch. To board 105439.00
  - (i) Transmission Rs. Sanctioned For Rs. 267200
  - (ii) Transformation Rs. ...
  - (iii) Distribution Rs. ...
- (b) Ch. To Consumer To. Deptt. Rs. nil
  - (i) Transmission Rs. P.G. Rs. 105439.00
  - (ii) Transformation Rs.
  - (iii) Distribution Rs.

Checked by

Drafts Man

*[Signature]*

J.E.

*[Signature]*

S.D.O

*[Signature]*

D.A(W)


Ex. Engr.  
 Elect. Distr Divion  
 Chandausi

Executive Engineer

Proposed line chart to give connection Shri  
S/O SH. RAMPAL  
Distt. Sambhal

OMWATI  
VILL. MALLAH MUSHTAFA BAD P.O KHAS

**DETAIL LINE CHART**

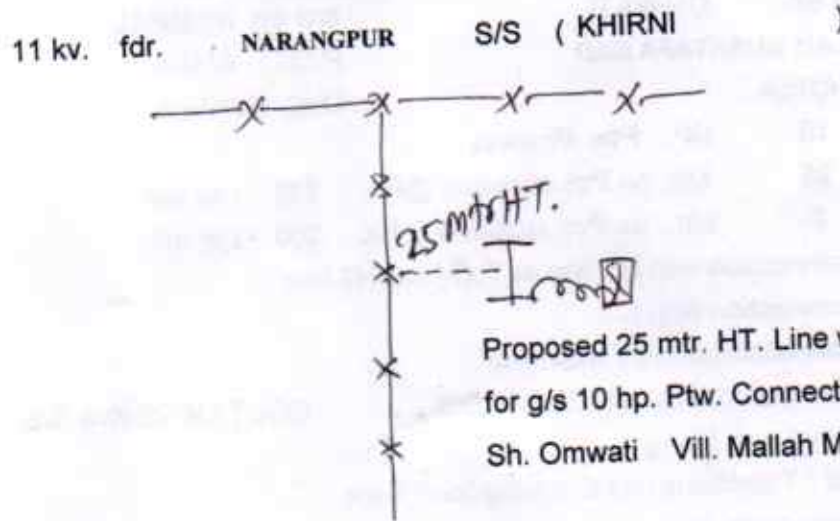

**VOLTAGE DROP :-**

Surveyed by shri

**URMAAN SINGH LM.**

**(A) List of Material**

01. Pcc Pole	NO.	2.00
02. ACSR Weasel con.	MTR.	87.00
03. Stay Rod 16x1800mm	NO.	3.00
04. Stay Wire 7/10 SWG	KG.	15.00
05. Earthing rod	NO.	2.00
06. 11kv disc Insulator	NO.	6.00
07. 11 kv disc fitting	NO.	6.00
08. 11 kv pin Insulator	NO.	3.00
09. 11 kv pin with Nut	NO.	3.00
10. 11 kv x-arm v- type	NO.	0.00
11. M.S. channel 100x50x6mm	KG.	44.00
12. M.S. angle 65x65x6mm	KG.	26.00
13. 11/0.4kv 25 kva T/F	NO.	1.00

**(B) Details**

1. Length of Live (a) HT.	25	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By

G/S TO SH.

OMWATI

S/O SH. RAMPAL

VILL. MALLAH MUSHTAFA BAD

**PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.  
JOB CARD**

PTW Deposit

(A) HT. LINE 25 MTR. (C) NEW S/S 25 KVA W/O NO. & DATE ..... STARTING DATE  
(B) LT. LINE 0 MTR. (D) INCREASING CAPTY. KVA TO ..... KVA COMPLETION DATE

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		QUANTITY ISSUED/RETURNED					
				ORIGINAL	REVISED	ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	NET QTY. ISSUED	
1	Pcc Pole 8.5 mtr. long	H0000557	01	NO.	2						
2	ACSR Weasel cond.	H300909	10	MTR...	87						
3	Stay Rod 16x1800 mm		10	NO.	3						
4	Stay Wire 7/10 SWG		07	KG.	15						
5	Earthing rod		07	NO.	2						
6	11kv Disc Insulator		01	NO.	6						
7	11kv Disc Fitting		01	NO.	6						
8	11kv Pin Insulator		15	NO.	3						
9	11kv Pin with Nut		01	NO.	3						
10	11kv X-Arm V Type		01	NO.	0						
11	M.S. Channel 100X50x6 mm		09	KG.	44						
12	M.S. Angle 65x65x6 mm		01	KG.	26						
13	11/0.4 kv 25 kva T/F			NO.	1						
14											
15											

NAME OF ESTIMATE

*Handwritten signature and initials*

ESTIMATE NO. ....

FIELD SUB DIV. NAME

P.T.O