



कार्यालय अधिशासी अभियन्ता,
पश्चिमांचल विद्युत वितरण निगम लि०,
विद्युत वितरण खण्ड
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 11288 / विविखचं / तक०
विषय- धनराशि जमा करने के सम्बन्ध में।

दिनांक 7-11-2023

श्रीमति कमला पत्नी श्री किशनपाल
पता / साईट-गाटा सं० 14, अर्जूनपुर जूना,
ब्लाक-बहजोई।


मो०नं०- 8630417447

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं० / चालान नं० 1008338621 दिनांक 01/11/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा / एचपी / केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	(S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	122902.00
	कुल योग	130859.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।


अधिशासी अभियन्ता

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.

Electricity Distribution Division CHANDAUSI

ESTIMATE PTW.

Sanction Pro.Fee R.NO. 1008338621 Pro.Fee Amount 100.00
Date 01/11/2023 Scheme DEPOSIT

Estimate framed by SDO III EDS-III BAHJOI
For giving supply to Sh. KAMLA W/O SH. KISHANPAL
Village ARJUNPUR JUNA P.O KHAS
Block BAHJOI Distt. Sambhal

				AMOUNT
Load	10	HP. Ptw. Process .		Rs. 28320.00 ✓
1.11KV Line	120	Mtr. on Pcc supports @Rs.	236 per mtr.	Rs. 0.00
2.LT Line3Ph.	0	Mtr. on Pcc supports @Rs.	200 per mtr.	Rs.
3.Extra cost of HT connection with HT line or Toff from HT line				Rs.
4.Extra cost of HT connection with S/S				Rs.
5.Extra cost of LT connection with LT main line				Rs.
6.Extra cost of LT connection with upto 25KVA S/S		COST OF 25 Kva S/S		Rs. 94582.00 ✓
7.Extra cost for terminal pole fitting				Rs.
8.Extra cost for Road / Telephone line Crossing for HT line				Rs.
9.HT line / LT line Inspection fee				Rs.
Total-Rs.				122902.00 ✓

10.Length of line ch.to Corporation.....	Meters		
11.Length of line ch.to Consumer....	120 Meters		
(Beyond free Limit of 190 meters)			
Total	120 Meters		
12.(a)11/0.4KV S/S.....25.....KVA vide Schedule No.	Ch. To PC		Ch.to Crop. / PC
13.Electric Inspection of T/F			Rs.
14.System Loading charges			Rs. 4957 ✓
15.Fixed charges			Rs.

The HT Line/LT Line will be tapped from BAHPUR fdr, S/S in Vill. ARJUNPUR JUNA
Connection from 33/11KV S/S at BAHJOI
Certified that the cosing of work involved has been done according to standard schedule framed in division
On current stock issue rate.
(line chart on its back)

Sanctioned Amount for Rs. 127859=00
S No. for financial year 23-24
Classified as under :
(a) Ch. To board
(i) Transmission Rs. 127859=00
(ii) Transformation Rs. 00
(iii) Distribution Rs. 00
(b) Ch. To Consumer
(i) Transmission Rs. 00
(ii) Transformation Rs. 00
(iii) Distribution Rs. 00


Checked by
DRAFTS MAN
J.E.-D

S.D.O

D.A(W)

Ex. Eng.
Elect. Distr Divor.
Chandausi
Executive Engineer

DETAIL LINE CHART

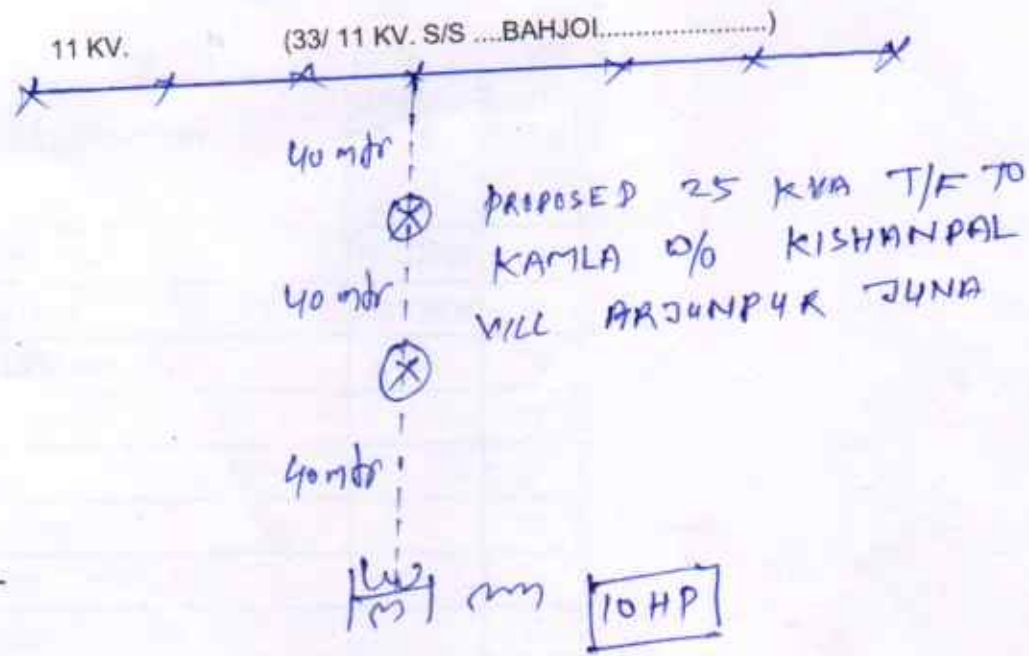

VOLTAGE DROP :-

Surveyed by shri

JAI VIR SINGH

(A) List of Material

- 01. Pcc Pole
- 02. ACSR Weasel con.
- 03. Stay Rod 16x1800mm
- 04. Stay Wire 7/10 SWG
- 05. Earthing rod
- 06. 11kv disc Insulator
- 07. 11 kv disc fitting
- 08. 11 kv pin Insulator
- 09. 11 kv pin with Nut
- 10. 11 kv x-arm v-type
- 11. M.S. channel 100x50x6mm
- 12. M.S. angle 65x65x6mm
- 13. 11/0.4kv 25 kva T/F

NO.	4
MTR	380
NO.	2
KG.	25
NO.	2
NO.	6
NO.	6
NO.	6
NO.	6
NO.	2
KG.	44
KG.	26
NO.	1

(B) Details

1. Length of Live (a) HT.	120	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By

Jai
Junior Engineer

[Signature]
Sub Divisional Officer

TO SH.

KAMILA

W/O SH. KISHANPAL

VILL. ARJUNPUR JUNA

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD. JOB CARD

PTW

(A) HT. LINE 120
(B) LT. LINE 0

MTR. MTR.

(C) NEW S/S 25 KVA W/O NO. & DATE STARTING DATE
(D) INCREASING CAPTY. KVA TO KVA COMPLETION DATE

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	NET QTY. ISSUED
				ORIGINAL	REVISED					
1	Pcc Pole 8.5 mtr. long	H000557	01	NO.	4					
2	ACSR Weasel cond.	H300909	10	MTR..	382					
3	Slay Rod 16x1800 mm		10	NO.	2					
4	Slay Wire 7/10 SWG		07	KG.	25					
5	Earthing rod		07	NO.	2					
6	11kv Disc Insulator		01	NO.	6					
7	11kv Disc Fitting		01	NO.	6					
8	11kv Pin Insulator		15	NO.	6					
9	11kv Pin with Nut		01	NO.	6					
10	11kv Pin with Nut		01	NO.	2					
11	11kv X-Arm V Type		09	KG.	44					
12	M.S. Channel 100x50x6 mm		01	KG.	26					
13	M.S. Angle 65x65x6 mm		01	KG.	1					
14	11/0.4 kv 25 kva T/F			NO.						
15										

NAME OF ESTIMATE

ESTIMATE NO.

FIELD SUB DIV. NAME

P.T.O

Handwritten signature and initials