



कार्यालय अधिशासी अभियन्ता,
पश्चिमांचल विद्युत वितरण निगम लि०,
विद्युत वितरण खण्ड
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 14364 / विविखचं / तक०
विषय- धनराशि जमा करने के सम्बन्ध में।

दिनांक 23/11/23

श्री जागन पुत्र श्री भूरे
पता/साईट-गाटा सं० 153, कमालपुर खानुपूरा,
ब्लाक-पवांसा।

मो०नं०- 9639221635

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008341798 दिनांक 11/11/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	(S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	96942.00
	कुल योग	104899.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।


अधिशासी अभियन्ता

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.
Electricity Distribution Division CHANDAUSI

ESTIMATE PTW.

Sanction Pro.Fee R.NO. 1008341798 Pro.Fee Amount 100.00
Date 45241 Scheme Deposit 0

Estimate framed by
For giving supply to Sh.

SDO IV EDSD-IV CHANDAUSI
JAGAN

Village **KHANUPURA**
Block **PAWANSA**

S/O SH. **BHURE**
P.O **PAWANSA**
Distt. Sambhal

	Load	HP. Ptw. Process.	AMOUNT
1.11KV Line	10	Mtr. on Pcc supports @Rs. 236 per mtr.	Rs. 2360.00
2.LT Line3Ph	0	Mtr. on Pcc supports @Rs. 200 per mtr.	Rs. 0.00
3.Extra cost of HT connection with HT line or Toff from HT line			Rs.
4.Extra cost of HT connection with S/S			Rs.
5.Extra cost of LT connection with LT main line			Rs.
6.Extra cost of LT connection with upto 25KVA S/S			Rs.
7.Extra cost for terminal pole fitting			Rs. 94582.00
8.Extra cost for Road / Telephone line Crossing for HT line			Rs.
9.HT line / LT line Inspection fee			Rs.

COST OF 25 Kva S/S

Total-Rs.

96942.00

10.Length of line ch.to Corporation..... Meters
11.Length of line ch.to Consumer..... Meters

(Beyond free Limit of 190 meters)

Total Meters

12.(a)11/0.4KV S/S..... KVA vide Schedule No. Ch. To PC

Ch.to Crop. / PC

Rs. 4957.00

13.Electric Inspection of T/F

Rs.

14.System Loading charges

Rs.

15.Fixed charges

Rs.

The HT Line/LT Line will be tapped from
Connection from 33/11KV S/S at **KELADEVI**

KHANUP fdr. S/S in Vill.

KHANUPURA

Certified that the cosiing of work involved has been done according to standard schedule framed in division
On current stock issue rate.

(line chart on its back)

Sanctioned Amount forRs. 101899.00

S No **1836** 22/11/23 for financial year **23-24**

Classified as under:

- (a) Ch. To board **101899=00**
(i) Transmission Rs. **Eight**
(ii) Transformation Rs. **Eight**
(iii) Distribution Rs. **Eight**
(b) Ch. To Consumer **101899=00**
(i) Transmission Rs. **Eight**
(ii) Transformation Rs. **Eight**
(iii) Distribution Rs. **Eight**

Checked by

Drafts Man

J.E.

S.D.O

D.A(W)


Ex. Engr.

Flect. Distr. Divison

Executive Engineer

DETAIL LINE CHART

11 kv. fdr. KHANUPURA S/S (KELADEVI)

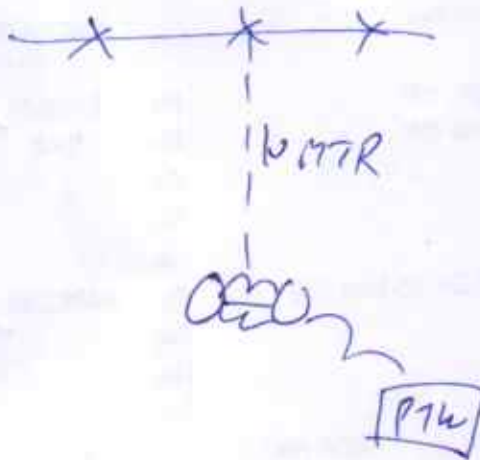

Proposed 10 mtr. HT. line with 25 kva s/s
for g/s 10 hp. Ptw. Connection to
Sh. JAGAN VILL KHANUPURA

VOLTAGE DROP :-

Surveyed by shri

RAMESH

(A) List of Material

01. Pcc Pole	NO.	2.00
02. ACSR Weasel con.	MTR	40.00
03. Stay Rod 16x1800mm	NO.	3.00
04. Stay Wire 7/10 SWG	KG.	15.00
05. Earthing rod	NO.	2.00
06. 11kv disc Insulator	NO.	6.00
07. 11 kv disc fitting	NO.	6.00
08. 11 kv pin Insulator	NO.	3.00
09. 11 kv pin with Nut	NO.	3.00
10. 11 kv x-arm v- type	NO.	0.00
11. M.S. channel 100x50x6mm	KG.	26.00
12. M.S. angle 65x65x6mm	KG.	44.00
13. 11/0.4kv 25 kva T/F	NO.	1.00

(B) Details

1. Length of Live (a) HT.	10	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By

bnik

Junior Engineer

Ad

Sub Divisional Officer

S TO SH.

JAGAN

S/O SH. BHURE

VILL. KHANUPURA

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD. JOB CARD

(A) HT. LINE

10

(B) LT. LINE

0

MTR.

(C) NEW S/S 25 KVA

W/O NO & DATE

STARTING DATE

(D) INCREASING CAPTY. KVA TO

KVA COMPLETION DATE

PTW

Deposit

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		QUANTITY ISSUED/RETURNED			
				ORIGINAL	REVISED	ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.	NET QTY. ISSUED
1	Poc Pole 8.5 mtr. long	H000557	01	NO.	2				
2	ACSR Weasel cond.	H300909	10	MTR.	40				
3	Stay Rod 16x1800 mm		10	NO.	3				
4	Stay Wire 7/10 SWG		07	KG.	15				
5	Earthing rod		07	NO.	2				
6	11kv Disc Insulator		01	NO.	6				
7	11kv Disc Fitting		01	NO.	6				
8	11kv Pin Insulator		15	NO.	3				
9	11kv Pin with Nut		01	NO.	3				
10	11kv X-Arm V Type		01	NO.	0				
11	M.S. Angle 65x65x6 mm		09	KG.	26				
12	M.S. Channel 100X50x6 mm		01	KG.	44				
13	11/0.4 kv 25 kva T/F			NO.	1				
14									
15									

NAME OF ESTIMATE

ESTIMATE NO.

FIELD SUB DIV. NAME

P.T.O