



कार्यालय अधिशासी अभियन्ता,  
पश्चिमांचल विद्युत वितरण निगम लि.0,  
विद्युत वितरण खण्ड  
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 14422 /विविखचं/तक0  
विषय-धनराशि जमा करने के सम्बन्ध में।

दिनांक 25/11/23

श्री लक्ष्मी पुत्र श्री रोहन सिंह  
पता/साईट-गाटा सं0 168, करछली,  
ब्लाक-पवांसा।

मो0नं0- 7703876611

आपको सूचित किया जाता है कि इस कार्यालय के रू0 100 रसिद सं0/चालान नं0 1008341597 दिनांक 10/11/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र0सं0	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	( S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	104022.00
	कुल योग	111979.00

- रू0 जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।

  
अधिशासी अभियन्ता



**Electricity Distribution Division CHANDAUSI**

**ESTIMATE PTW.**

0

Sanction Pro.Fee R.NO. ~~1008341507~~ **1008341597** Pro.Fee Amount 100.00  
 Date 10.11.2023 Scheme **Deposit**

Estimate framed by SDO II EDSO-II CHANDAUSI  
 For giving supply to Sh. **LAKSHMI** S/O SH. **ROHAN SINGH**  
 Village **ORANGA BAD DEVRI** P.O **PAWANSA**  
 Block **PAWANSA** Distt. Sambhal

				AMOUNT
Load	10	HP. Ptw. Process		
1.11KV Line	40	Mtr. on Pcc supports @Rs.	236 per mtr.	Rs. 9440.00 ✓
2.LT Line3Ph	0	Mtr.. on Pcc supports @Rs.	200 per mtr.	Rs. 0.00
3.Extra cost of HT connection with HT line or Toff from HT line				Rs.
4.Extra cost of HT connection with S/S				Rs.
5.Extra cost of LT connection with LT main line				Rs.
6.Extra cost of LT connection with upto 25KVA S/S		COST OF 25 Kva S/S		Rs. 94582.00 ✓
7.Extra cost for terminal pole fitting				Rs.
8.Extra cost for Road / Telephone line Crossing for HT line				Rs.
9.HT line / LT line Inspection fee				Rs.

**Total-Rs. 104022.00**

10.Length of line ch.to Corporation..... Meters  
 11.Length of line ch.to Consumer..... Meters

**(Beyond free Limit of 190 meters)**

Total .....	Meters		Ch.to Crop. / PC
12.(a)11/0.4KV S/S.....	KVA vide Schedule No. ....	Ch. To PC	Rs. 4957.00
13.Electric Inspection of T/F			Rs.
14.System Loading charges			Rs.
15.Fixed charges			Rs.

The HT Line/LT Line will be tapped from **NARANG** fdr. S/S in Vill. **ORANGA BAD DEVRI**  
 Connection from 33/11KV S/S at **KHIRNI**

Certified that the cosing of work involved has been done according to standard schedule framed in division  
 On current stock issue rate.

**( line chart on its back)**

Sanctioned Amount forRs. **108979.00** ✓  
 S No. **1849** for financial year **23-24**

Classified as under : **108979.00**  
 (a) Ch. To board **Amt. Sanctioned For Rs. 24520**  
 (i) Transmission Rs. **Eight Nine Seven Nine**  
 (ii) Transformation Rs. **Sanction No. & Date 1849 R 25.11.23**  
 (iii) Distribution Rs. **To Deptt. Rs. nil**  
 (b) Ch. To Consumer **P.G. Rs. 108979.00**

Checked by

(i) Transmission Rs.  
 (ii) Transformation Rs.  
 (iii) Distribution Rs.  
**Ex. Engr.**  
**Elect. Distr. Div.**  
**Chandausi**

Drafts Man

  
**JE.**

  
**S.D.O**

**D.A(W)**

**Executive Engineer**



Proposed line chart to give connection Shri

LAKSHMI

S/O SH.

BHARAT

VILL.

ORANGA BAD DEVRI


P.O

PAWANSA

Distt.Sambhal

**DETAIL LINE CHART**

11 kv. fdr. NARANGPUR S/S ( KHIRNI )

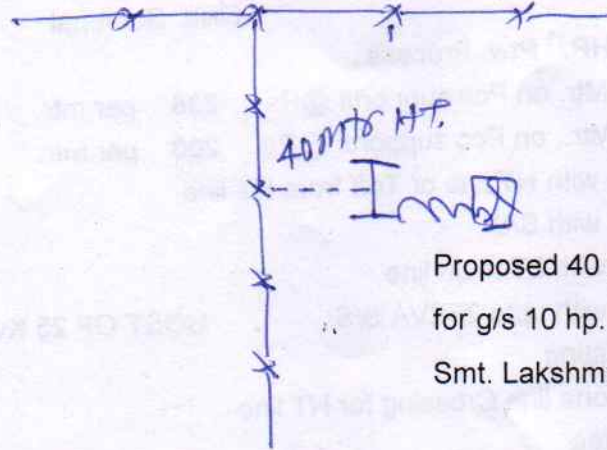

Proposed 40 mtr. HT. Line with 25 kva s/s  
for g/s 10 hp. Ptw. Connection to  
Smt. Lakshmi Vill. Oranga bad devri

**VOLTAGE DROP :-**

Surveyed by shri

**VIJENDRA SINGH LM.**

**(A) List of Material**

**(B) Details**

01.Pcc Pole	NO.	2.00	1.Length of Live (a)HT.	40	MTR
02. ACSR Weasel con.	MTR.	132.00	(b)LT.	0	MTR
03. Stay Rod16x1800mm	NO.	3.00	2.Existing capacity of S/S	0	KVA
04. Stay Wire7/10 SWG	KG.	15.00	3.Existing Load	0	HP
05. Earthing rod	NO.	2.00	4.Proposed Load	10	HP
06.11kv disc Insulator	NO.	6.00	5.Proposed capacity ofS/S	25	KVA
07.11 kv disc fitting	NO.	6.00			
08.11 kv pin Insulator	NO.	3.00			
09.11 kv pin with Nut	NO.	3.00			
10.11 kv x-arm v- type	NO.	0.00			
11. M.S.channel 100x50x6m	KG.	44.00			
12. M.S.angle 65x65x6mm	KG.	26.00			
13.11/0.4kv 25 kva T/F	NO.	1.00			

Proposed By



G/S TO SH.

LAKSHMI

S/O SH. ROHAN SINGH

VILL. ORANGA BAD DEVRI

PTW Deposit

**PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.  
JOB CARD**

(C) NEW S/S 25 KVA W/O NO & DATE ..... STARTING DATE  
(D) INCREASING CAPTY. KVA TO ..... KVA COMPLETION DATE

(A) HT. LINE 40  
(B) LT. LINE 0

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		QUANTITY ISSUED/RETURNED				NET QTY. ISSUED	
				ORIGINAL	REVISED	ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.		
1	Pcc Pole 8.5 mtr. long	H000557	01	NO.	2						
2	ACSR Weasel cond.	H300909	10	MTR..	132						
3	Stay Rod 16x1800 mm		10	NO.	3						
4	Stay Wire 7/10 SWG		07	KG.	15						
5	Earthing rod		07	NO.	2						
6	11kv Disc Insulator		01	NO.	6						
7	11kv Disc Fitting		01	NO.	6						
8	11kv Pin Insulator		15	NO.	3						
9	11kv Pin with Nut		01	NO.	3						
10	11kv X-Arm V Type		01	NO.	0						
11	M.S. Channel 100X50x6 mm		09	KG.	44						
12	M.S. Angle 65x65x6 mm		01	KG.	26						
13	11/0.4 kv 25 kva T/F			NO.	1						
14											
15											

NAME OF ESTIMATE  
ESTIMATE NO. ....

FIELD SUB DIV. NAME

P.T.O