



कार्यालय अधिशासी अभियन्ता,
पश्चिमांचल विद्युत वितरण निगम लि०,
विद्युत वितरण खण्ड
चन्दौसी

CIN NO. U31200UP2003SGC27485

Email Id- eddchandausi@gmail.com

दिनांक ४-१२-२३

पत्रांक 18280 /विविखचं/तक०
विषय-धनराशि जमा करने के सम्बन्ध में।

श्री दीनानाथ पुत्र श्री नेकसे
पता/साईट-गाटा सं० 561/0.5, लतीफपुर,
ब्लाक-बहजोई।

मो०नं०- 8077030977

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008354369 दिनांक 23/11/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।
कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	(S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	99302.00
	कुल योग	107259.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि वाद में देय नहीं है।
- वॉरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।

अधिशासी अभियन्ता

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.

Electricity Distribution Division CHANDAUSI

ESTIMATE PTW.

Sanction Pro.Fee R.NO. 1008328276 Pro.Fee Amount 100.00
Date Scheme DEPOSIT

Estimate framed by SDO 4 EDSD-4 CHANDAUSI
For giving supply to Sh. DEENANATH S/O SH. NEKSE
Village PASTORA P.O PASTORA
Block PAWASA Distt. Sambhal

	AMOUNT
Load 10 HP. Ptw. Process .	
1.11KV Line 20 Mtr. on Pcc supports @Rs. 236 per mtr.	Rs. 4720.00
2.LT Line3Ph. Mtr.. on Pcc supports @Rs. 200 per mtr.	Rs. 0.00
3.Extra cost of HT connection with HT line or Toff from HT line	Rs.
4.Extra cost of HT connection with S/S	Rs.
5.Extra cost of LT connection with LT main line	Rs.
6.Extra cost of LT connection with upto 25KVA S/S COST OF 25 Kva S/S	Rs. 94582.00
7.Extra cost for terminal pole fitting	Rs.
8.Extra cost for Road / Telephone line Crossing for HT line	Rs.
9.HT line / LT line Inspection fee	Rs.

Total-Rs. 99302.00

10.Length of line ch.to Corporation..... Meters	
11.Length of line ch.to Consumer..... Meters	
(Beyond free Limit of 190 meters)	
Total Meters	
12.(a)11/0.4KV S/S.....KVA vide Schedule No. Ch To PC	Ch.to Crop. / PC
13.Electric Inspection of T/F	Rs. 4257=00
14.System Loading charges	Rs.
15.Fixed charges	Rs.

The HT Line/LT Line will be tapped from KAILMU NDI fdr. S/S in Vill. PASTORA
Connection from 33/11KV S/S at KAILADEVI

Certified that the cosiing of work involved has been done according to standard schedule framed in division
On current stock issue rate.
(line chart on its back)

Sanctioned Amount forRs. 104259=00
S No. for financial year 23-24

- Classified as under:
- (a) Ch. To board
 - (i) Transmission Rs.
 - (ii) Transformation Rs. 104259=00
 - (iii) Distribution Rs. Sanctioned For Rs. 0=2000
 - (b) Ch. To Consumers..... four thro. line.
 - (i) Transmission Rs. No. & Date
 - (ii) Transformation Rs. ptt. Rs. 1110
 - (iii) Distribution Ra. P.G. Rs. 104259=00

Checked by

DRAFTS MAN
[Signature]
J.E.

[Signature]
S.D.O

D.A(W)


[Signature]
Ex. Engr.
Frect. Distr. Divior
Executive Engineer

Proposed line chart to give connection Shri
S/O SH. NEKSE VILL. PASTORA
Distt.Sambhal

DEENANATH
PASTORA P.O PAST

DETAIL LINE CHART

11 kv. fdr. KAILMUNDI S/S (KAILADEVI)

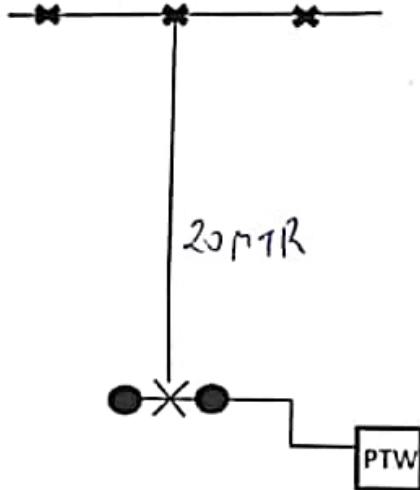

Proposed 20 mtr. H.T LINE with 25 kva s/s
for g/s 10 hp. Ptw. Conn. of Deenanath
VILL Pastora

VOLTAGE DROP :-

Surveyed by shri

SATYPAL

(A) List of Material

01. Pcc Pole	NO.	2.00
02. ACSR Weasel con.	MTR.	70.00
03. Stay Rod 16x1800mm	NO.	3.00
04. Stay Wire 7/10 SWG	KG.	15.00
05. Earthing rod	NO.	2.00
06. 11kv disc Insulator	NO.	6.00
07. 11 kv disc fitting	NO.	6.00
08. 11 kv pin Insulator	NO.	0.00
09. 11 kv pin with Nut	NO.	0.00
10. 11 kv x-arm v- type	NO.	0.00
11. M.S.channel 100x50x6mm	KG.	44.00
12. M.S.angle 65x65x6mm	KG.	26.00
13. 11/0.4kv 25 kva T/F	NO.	1.00

(B) Details

1. Length of Live (a) HT.	20	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By

Junior Engineer

Sub Divisional Officer

G/S TO SH.

DEENANATH

S/O SH. NEKSE

VILL. PASTORA

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.
JOB CARD

PTW DEPOSIT

(A) HT. LINE 20 MTR. (C) NEW S/S 25 KVA W/O NO. & DATE STARTING DATE
(B) LT. LINE 0 MTR. (D) INCREASING CAPTY. KVA TO KVA COMPLETION DATE

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		QUANTITY ISSUED/RETURNED					
				ORIGINAL	REVISED	ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.	ISSUE NO. DT.	NET QTY. ISSUED	
1	Pcc Pole 8.5 mtr. long	H000557	01	NO.	2						
2	ACSR Weasel cond.	H300909	10	MTR..	70						
3	Stay Rod 16x1800 mm		10	NO.	3						
4	Stay Wire 7/10 SWG		07	KG.	15						
5	Earthing rod		07	NO.	2						
6	11kv Disc Insulator		01	NO.	6						
7	11kv Disc Fitting		01	NO.	6						
8	11kv Pin Insulator		15	NO.	0						
9	11kv Pin with Nut		01	NO.	0						
10	11kv X-Arm V Type		01	NO.	0						
11	M.S. Channel 100x50x6 mm		09	KG.	44						
12	M.S. Angle 65x65x6 mm		01	KG.	26						
13	11/0.4 kv 25 kva T/F			NO.	1						
14					0						
15					0						

NAME OF ESTIMATE

SRI SHIVAM VARSHNEY(J.E)

FIELD SUB DIV. NAME

P.T.O

ESTIMATE NO.