

Application NO = 1008315169

REPORT

An estimate amounting to Rs. 91280.00 Has been framed to Cover the cost for Giving Service Connection to P.T.W./I.P./Commercial Sri Bhem Charanda s/o Sri Bhada Village Bhaisampur Post Bhaisampur Block Talwara District- Fatehpur. Under Scheme Full Deposit 10 H.P./K.W.

In the estimate provision for construction of 30 Mtr. 11 KV L.T. & 25 KVA Sub Station.

The Proposed Line for above connection will be tapped from Roda Feeder/Sub Station in Village Bhaisampur Emancating from 132/33/11 KV Sub Station at Saura.

The rate provided in the estimate as per current rate Cost Data of 2016-17 and market rate.

The work will be carried out by the consumer under the Direct Supervision of section Holder and S.D.O. Electricity Distribution Officer Electricity Distribution Sub Division Madua Fatehpur.

S.D.O.
8004

J.E.
13/12/2023

32/11 KV S/S Saura

GIVING SERVICE CONNECTION TO Sri Prem Charada

S/o Bhadai

10

H.P./K.W./ P.T.W./I.P./COMMERCIAL CONNECTION

VILLAGE Bhairampur

POST Bhairampur

BLOCK Teliyara

DISTRICT-FATEHPUR (U.P.)

SL.No.	PARTICULAR'S	AMOUNT
01	B-TRANSMISSION	3721-00
02	C- TRANSMISSION	110782-00
03	D- TRANSMISSION	-
04	FIX CHARGE	5000-00
05	SYSTEM LOADING CHARGE	-
	SUB TOTAL	125503-00
	LESS LABOUR CHARGES+CONCERTING (-)	34223-00

91280-00

S.D.O.
8004

J.E.
13/12/2023

33/11 KV S/S Saura

Sri/Smt. _____


H.P./K.W. _____

P.T.W./I.P./COMMERCIAL CONNECTION
BLOCK _____

DISTRICT FATEHPUR (U.P.) POST _____

PROCESSING FEE Rs. 200/= VIDE
DATED. / / 202


R.N. _____

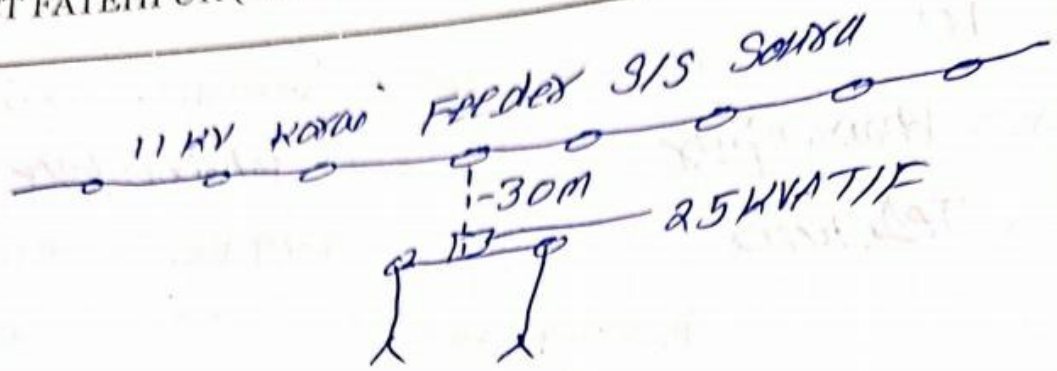

DETAIL :

- 01-PROPOSED DISTANCE 30 MTR.
- 02-PROPOSED LOAD FOR PTW 10 H.P.
- 03-PROPOSED S/S OR T/F 25 KVA.


S.D.O.


J.E.

33/11 KV S/S SARA

TRANSMISSION

0.30 Km

SL	PARTICULAR	UNIT	RATE	QTY	AMOUNT
01	P.C.C. Pole 8.5 Mtr. With stone Pad	No.	2861.00	-	-
02	V-Type X-arm M-S Angle 65X65Xmm	No.	744.00	-	-
03	X-Arm Holding Clamp	No.	304.00	-	-
04	ACSR Weasel Conductor	Mtr.	23.98	93	2230.00
05	11 KVA Pin Insulator With Pin	No.	268.00	03	804.00
06	F Clamp For PCC Pole	No.	265.00	-	-
07	Jointing Sleeve For ACSR Weasel	No.	103.00	03	309.00
08	Dangar Plate With Clamp & Bolt	No.	461.00	-	-
09	Barbed Wire	No.	162.00	-	-
10	Extra Stay at Angle Location	No.	2027.00	01	2027.00
11	T-Off Channel	No.	478.00	01	478.00
12	Concerting of Stay	No.	379.00	01	379.00
13	11 KV Disc Insulator With Fitting T&C	No.	412.00	03	1236.00
14	Earthing Complete	No.	838.00	-	-
15	Concerting of support	No.	856.00	-	-
16	Section Doable Pole on PCC Annex-02	No.	38574.00	-	-
				-	-
				-	-
				-	-
				-	-
				-	-
				-	-
	TOTAL				7463.00
	Labour and Over Head Charges @75255.00/Km.				2258.00
	G.TOTAL				9721.00

SAY Rs. 9721.00

S.D.O.
8/11/23

J.E.
13/11/2023

32/11 KV S/S Saida

25 KVA Sub-Station

SL	PARTICULAR	UNIT	RATE	QTY.	AMOUNT
01	P.C.C.Pole 8.5 Mtr Long With Stone Pad	No.	2861.00	2	5722.00
02	Top Channel	No.	832.00	1	832.00
03	Dropper Channel	No.	748.00	1	748.00
04	M/S Angle 75x75x6x2008 (T/F Base)	No.	1778.00	2	3556.00
05	M/S T-Off Channel	No.	478.00	1	478.00
06	Clamp with Nut Bolt	No.	259.00	11	2849.00
07	11KV Disc Insulator With Fitting	No.	412.00	3	1236.00
08	11 KV Pin Insulator With Pin	No.	268.00	3	804.00
09	11 KV T.P.M.O.Set	No.	18292.00	1	18292.00
10	Danger Board	No.	461.00	1	461.00
11	25 KVA T/F	No.	56780.00	1	56780.00
12	Stay Set Complete	No.	2027.00	2	4054.00
13	Earthing Complete	No.	838.00	2	1676.00
14	Connecting Of Stay	No.	379.00	2	758.00
15	Concerting of Supporte	No.	856.00	2	1712.00
	Labour and Over Head Charges	L.S.	29116.00	1	29116.00
TOTAL					129074.00

110782.00


S.D.O.
S.D.O.


J.E. 13/12/2023

32/11 KV S/S Sarda

--: तकनीकी आख्या :-

अधिशायी अभियन्ता विद्युत वितरण खण्ड-प्रथम फतेहपुर के कार्यालय पत्र सं०-..... के विद्युतीकरण हेतु तकनीकी आख्या-

- 1- उपरोक्त उपभोक्ता का विद्युत संयोजन 33/11 के.वी. कोराई पर स्थापित पावर परितर्वतक नं०-02 से जुड़े इनकमिंग नं०-02 से जोड़ा जायेगा वर्तमान में इनकमिंग नं०-02 पर 410 एम्पीयर भार चल रहा है जो पीक आवर्स में 430 इनकमिंग नं०-02 का सीटी रेशियों 800/400/5A ए है। एवं 33 कॅ०वी० साइड पर 800/100/1A ए रेशियों की सीटी लगी हुई है।
- 2- उपरोक्त उपभोक्ता का विद्युत संयोजन इनकमिंग नं०-02 से निकलने वाले 1.1 फी के.वी. कोराई पोषक से जोड़ा जायेगा। इस पोषक पर वर्तमान में 160 एम्पीयर का भार चल रहा है जो पीक आवर्स में 180 एम्पीयर चला जाता है इस पोषक का सीटी रेशियों 400/200/5A ए है।
- 3- मानचित्र में परितर्वक, लाइन एवं एच.टी. मीटरिंग दर्शाया गया है एवं अलग से सिंगल ड्राइग्राम संलग्न है।
- 4- 11 के.वी. पोषक पर ए.सी.एस.आर. वीजल कण्डक्टर लगा हुआ है ए कण्डक्टर बदलने की आवश्यकता है / नहीं है।
- 5- वितरण कोड 2005 बिन्दु संख्या 4.5 के अनुसार प्रस्तावित स्थल का निरीक्षण किया गया यह स्थल मोहल्ला बु गैरमपुर में स्थित है। यह सडक सार्वजनिक अतः अनापत्ति प्रमाण-पत्र की आवश्यकता नहीं है।
- 6- उपरोक्त उपभोक्ता के विद्युत संयोजन हेतु भार अवमुक्त करने की संस्तुति की जाती है।

उपखण्ड अधिकारी

अवर अभियन्ता