



कार्यालय अधिशासी अभियन्ता,
पश्चिमांचल विद्युत वितरण निगम लि०,
विद्युत वितरण खण्ड
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 20787 /विविखचं/तक०
विषय-धनराशि जमा करने के सम्बन्ध में।

दिनांक 28/12/23

श्रीमति सत्यवती पत्नी श्री नरेश
पता/साईट-गाटा सं० 939, अर्जुनपुर जूना,
ब्लाक-बहजोई।

मो०नं०- 6395995878

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008361936 दिनांक 21/12/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेने के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	(S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	96942.00
	कुल योग	104899.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रुपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना अनिवार्य करे।

अधिशासी अभियन्ता
nca

PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.

Electricity Distribution Division CHANDAUSI

ESTIMATE PTW.

Sanction Pro.Fee R.NO. **1008361936** Pro.Fee Amount 100.00
Date 21/12/2023 Scheme DEPOSIT

Estimate framed by SDO III EDSO-III BAHJOI

For giving supply to Sh. **SATYAWATI** W/O **NARESH**

Village **ARJUNPUR JUNA** P.O **KHAS**

Block **BAHJOI** Distt. Sambhal

					AMOUNT
Load	10	HP. Ptw. Process .			
1.11KV Line	10	Mtr. on Pcc supports @Rs.	236	per mtr.	Rs. 2360.00 ✓
2.LT Line3Ph.	0	Mtr. on Pcc supports @Rs.	200	per mtr.	Rs. 0.00 ✓
3.Extra cost of HT connection with HT line or Toff from HT line					Rs.
4.Extra cost of HT connection with S/S					Rs.
5.Extra cost of LT connection with LT main line					Rs.
6.Extra cost of LT connection with upto 25KVA S/S		COST OF 25 Kva S/S			Rs. 94582.00 ✓
7.Extra cost for terminal pole fitting					Rs.
8.Extra cost for Road / Telephone line Crossing for HT line					Rs.
9.HT line / LT line Inspection fee					Rs.
Total-Rs.					96942.00 ✓

10.Length of line ch.to Corporation..... Meters

11.Length of line ch.to Consumer..... 10 Meters

(Beyond free Limit of 190 meters)

Total 10 Meters

12.(a)11/0.4KV S/S.....25.....KVA vide Schedule No. Ch. To PC

13.Electric Inspection of T/F

14.System Loading charges

15.Fixed charges

Ch.to Crop. / PC

Rs. 4957=00

Rs.

Rs.

Rs.

The HT Line/LT Line will be tapped from **BAHAPUR** fdr. S/S in Vill. **ARJUNPUR JUNA**
Connection from 33/11KV S/S at **BAHJOI**

Certified that the cosing of work involved has been done according to standard schedule framed in division
On current stock issue rate.

(line chart on its back)

Sanctioned Amount forRs. **101899=00**

S No.

for financial year **23-24**

Classified as under :

(a) Ch. To board

(i) Transmission Rs.

(ii) Transformation Rs.

(iii) Distribution Rs.

(b) Ch. To Consumer

(i) Transmission Rs.

(ii) Transformation Rs.

(iii) Distribution Rs.

1018992.00

Sanctioned For Rs. **0w zero**

Notes... **Okw. Okw. Eight Nika Nika.**

Sanction No. & Date

Ch. To. Deptt. Rs. **Nil**

Ch. To. P.G. Rs. **101899=00**

Checked by

DRAFTS MAN

[Signature]
J.E.-D

[Signature]
S.D.O

D.A(W)

[Signature]
Ex. Engr.


Exec. Distr Divior

[Signature]
Executive Engineer

Proposed line chart to give connection Shri
SH. NARESH VILL. ARJUNPUR
Distt. Sambhal

SATYAWATI
ARJUNPUR P.O KHAS

DETAIL LINE CHART

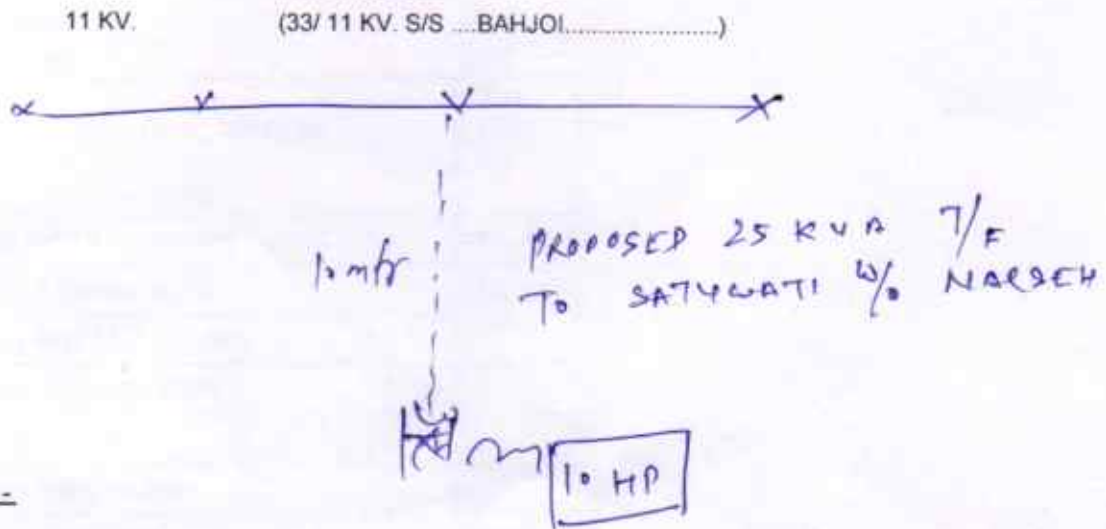

VOLTAGE DROP :-

Surveyed by shri **JAIVIR SINGH**

(A) List of Material

01. Pcc Pole	NO.	2
02. ACSR Weasel con.	MTR	30
03. Stay Rod 16x1800mm	NO.	2
04. Stay Wire 7/10 SWG	KG.	15
05. Earthing rod	NO.	2
06. 11kv disc Insulator	NO.	6
07. 11 kv disc fitting	NO.	6
08. 11 kv pin Insulator	NO.	0
09. 11 kv pin with Nut	NO.	0
10. 11 kv x-arm v- type	NO.	0
11. M.S. channel 100x50x6mm	KG.	44
12. M.S. angle 65x65x6mm	KG.	26
13. 11/0.4kv 25 kva T/F	NO.	1

(B) Details

1. Length of Live (a) HT.	10	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By


Junior Engineer


Sub-Divisional Officer

G/S TO SH.

SATYAWATI

S/O NARESH

VILL. ARJUNPUR JUNA

**PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.
JOB CARD**

PTW

(A) HT. LINE

10

MTR.

(C) NEW S/S 25 KVA W/O NO. & DATE

STARTING DATE
KVA COMPLETION DATE

(B) LT. LINE

0

MTR.

(D) INCREASING CAPTY. KVA TO

QUANTITY ISSUED/RETURNED

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		ISSUE		ISSUE		NET QTY ISSUED
				ORIGINAL	REVISED	NO. DT	NO. DT	NO. DT	NO. DT	
1	Poc Pole 8.5 mtr. long	H000557	01	NO.	2					
2	ACSR Weasel cond	H300909	10	MTR..	30					
3	Slay Rod 16x1800 mm		10	NO.	2					
4	Slay Wire 7/10 SWG		07	KG.	15					
5	Earthing rod		07	NO.	2					
6	11kv Disc Insulator		01	NO.	6					
7	11kv Disc Fitting		01	NO.	6					
8	11kv Pin Insulator		15	NO.	0					
9	11kv Pin with Nut		01	NO.	0					
10	11kv X-Arm V Type		01	NO.	0					
11	M.S. Channel 100x50x6 mm		09	KG.	44					
12	M.S. Angle 65x65x6 mm		01	KG.	26					
13	11/0.4 kv 25 kva T/F			NO.	1					
14										
15										

NAME OF ESTIMATE

ESTIMATE NO.

FIELD SUB DIV. NAME

P.T.O

Handwritten signature and initials