



कार्यालय अधिशासी अभियन्ता,  
पश्चिमांचल विद्युत वितरण निगम लि०,  
विद्युत वितरण खण्ड  
चन्दौसी

Email Id- eddchandausi@gmail.com

CIN NO. U31200UP2003SGC27485

पत्रांक 20869 / विविखचं / तक०  
विषय- धनराशि जमा करने के सम्बन्ध में।

दिनांक 30/12/23

श्री यशवीर सिंह पुत्र श्री विजेन्द्र सिंह  
पता/साईट-गाटा सं० 1493, वमनपुरी,  
ब्लाक-रजपुरा।


मो०नं०- 8433254092

आपको सूचित किया जाता है कि इस कार्यालय के रू० 100 रसिद सं०/चालान नं० 1008361222 दिनांक 19/12/2023 के द्वारा जमा योजना में स्वीकृत संयोजन 10 किवा/एचपी/केवीए के स्थायी नलकूप (LMV-5) विद्युत संयोजन को देने हेतु निम्नलिखित व्यय होगा।

कृपया आपसे निवेदन है कि निम्नलिखित धनराशि इस पत्र में अंकित विवरण के अनुसार अधिकतम तीन माह के अन्दर जमा कराये अन्यथा ये समझा जायेगा कि आप विद्युत संयोजन लेन के इच्छुक नहीं है और आपकी स्वीकृति रद्द कर दी जायेगी।

क्र०सं०	विवरण	जमा योजना
1.	जमानत राशि	3000.00
2.	( S.C Charge)	2036.00
3.	मीटर धनराशि	2921.00
4.	प्राक्कलन धनराशि	125262.00
	कुल योग	133219.00

- रू० जमा करने के पश्चात अपनी रसीद इस कार्यालय से 100/- के नॉनजुडिशियल स्टाम्प व पांच रूपये की रसीद टिकिट अपने दो गवाहों तथा अपने सब सहित इस कार्यालय में अनुबन्ध करें।
- फिटिंग रिपोर्ट तथा बैंक चालान फार्म अनुबन्ध के समय इस कार्यालय में जमा करें।
- पूर्ण जमा योजना के अन्तर्गत जमा राशि बाद में देय नहीं है।
- बोरिंग स्थल पर मीटर लगाने हेतु एक कमरे का निर्माण कराना सुनिश्चित करें।

  
अधिशासी अभियन्ता



**PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.**

**Electricity Distribution Division CHANDAUSI**

**ESTIMATE PTW.**

Sanction Pro.Fee R.NO. 1008361222 Pro.Fee Amount 100.00  
Date 19.2.18 Scheme **DEPOSIT**

Estimate framed by SDO 4 EDSD-4 CHANDAUSI

For giving supply to Sh. **YASHVIR** S/O SH. **VIJENDRA**

Village **BAMANPURI** P.O **BAMANPURI**

Block **PAWASA** Distt. Sambhal

Load **10** HP. Ptw. Process

1.11KV Line **130** Mtr. on Pcc supports @Rs. **236** per mtr. Rs. **30680.00**

2.LT Line3Ph. Mtr.. on Pcc supports @Rs. **200** per mtr. Rs. **0.00**

3.Extra cost of HT connection with HT line or Toff from HT line Rs.

4.Extra cost of HT connection with S/S Rs.

5.Extra cost of LT connection with LT main line Rs.

6.Extra cost of LT connection with upto 25KVA S/S **1/2 COST OF 25 Kva S/S** Rs. ~~47291.00~~ **91582**

7.Extra cost for terminal pole fitting Rs.

8.Extra cost for Road / Telephone line Crossing for HT line Rs.

9.HT line / LT line Inspection fee Rs.

**Total-Rs.**

**77974.00**

**125282**

10.Length of line ch.to Corporation..... Meters

11.Length of line ch.to Consumer..... Meters

**(Beyond free Limit of 190 meters)**

Total ..... Meters

Ch.to Crop. / PC

12.(a)11/0.4KV S/S.....KVA vide Schedule No. .... Ch. To PC

Rs. **4957=00**

13.Electric Inspection of T/F

Rs.

14.System Loading charges

Rs.

15.Fixed charges

Rs.

The HT Line/LT Line will be tapped from

SAADNA

GAR

fdr. S/S in Vill.

**BAMANPURI**

Connection from 33/11KV S/S at **KAILADEVI**

Certified that the cosing of work involved has been done according to standard schedule framed in division

On current stock issue rate.

**( line chart on its back)**

Sanctioned Amount forRs.

**130219=00**

S No.

**1981**

for financial year **23-24**

Classified as under :

(a) Ch. To board

**130219=00**

(i) Transmission Rs.

(ii) Transformation Rs.

(iii) Distribution Rs.

Sanctioned For Rs **One Hroze**

Rs. **200000 One Nihi**

(b) Ch. To Consumer

Sanction No. & D. **1981/29-12-23**

(i) Transmission Rs.

(ii) Transformation Rs.

(iii) Distribution Rs.

On. Deptt. Rs. **Nil**

P.G. Rs. **130219=00**

Checked by

DRAFTS MAN

**J.E.**

**S.D.O.**

**D.A(W)**

**Executive Engineer**


Elect. Disir Div.

**Chandausi**

Proposed line chart to give connection Shri YASHVIR  
 S/O SH. VIJENDRA VILL. BAMANPURI P.O. BAMANPURI  
 Distt. Sambhal

DETAIL LINE CHART

11 kv. fdr. SAADNAGAR S/S ( KAILADEVI )

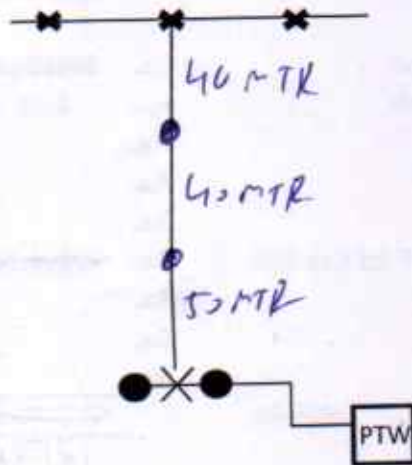

Proposed 130 Mtr. H.T LINE with 25 kva s/s  
 for g/s 10 hp. Ptw. Conn. of Yashvir  
 VILL Bamanpuri

VOLTAGE DROP :-

Surveyed by shri

SATYPAL


(A) List of Material

01. Pcc Pole	NO.	4.00
02. ACSR Weasel con.	MTR.	400.00
03. Stay Rod 16x1800mm	NO.	3.00
04. Stay Wire 7/10 SWG	KG.	15.00
05. Earthing rod	NO.	2.00
06. 11kv disc Insulator	NO.	6.00
07. 11 kv disc fitting	NO.	6.00
08. 11 kv pin Insulator	NO.	6.00
09. 11 kv pin with Nut	NO.	6.00
10. 11 kv x-arm v- type	NO.	2.00
11. M.S. channel 100x50x6mm	KG.	44.00
12. M.S. angle 65x65x6mm	KG.	26.00
13. 11/0.4kv 25 kva T/F	NO.	1.00

(B) Details

1. Length of Live (a) HT.	130	MTR
(b) LT.	0	MTR
2. Existing capacity of S/S	0	KVA
3. Existing Load	0	HP
4. Proposed Load	10	HP
5. Proposed capacity of S/S	25	KVA

Proposed By

  
Junior Engineer

  
Sub Divisional Officer

GIS TO SH.

YASHVIR

S/O SH. VIJENDRA

VILL. BAMANPURI

**PASHCHIMANCHAL VIDYUT VITRAN NIGAM LTD.  
JOB CARD**

PTW DEPOSIT

(A) HT. LINE  
(B) LT. LINE

130  
0

MTR.  
MTR.

(C) NEW S/S 25 KVA W/O NO. & DATE  
(D) INCREASING CAPTY. KVA TO

STARTING DATE  
KVA COMPLETION DATE

Sl. NO.	ITEM DESCRIPTION	ITEM CODE	UNIT CODE	ESTIMATED QTY.		ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	ISSUE NO. DT	NET QTY. ISSUED
				ORIGINAL	REVISED						
1	Pcc Pole 8.5 mtr. long	H000557	01	NO.	4						
2	ACSR Weasel cond.	H300909	10	MTR.	400						
3	Stay Rod 16x1800 mm		10	NO.	3						
4	Stay Wire 7/10 SWG		07	KG.	15						
5	Earthing rod		07	NO.	2						
6	11kv Disc Insulator		01	NO.	6						
7	11kv Disc Fitting		01	NO.	6						
8	11kv Pin Insulator		15	NO.	6						
9	11kv Pin with Nut		01	NO.	6						
10	11kv X-Arm V Type		01	NO.	2						
11	M.S. Channel 100x50x6 mm		09	KG.	44						
12	M.S. Angle 65x65x6 mm		01	KG.	26						
13	11/0.4 kv 25 kva T/F			NO.	1						
14					0						
15					0						

NAME OF ESTIMATE  
ESTIMATE NO. ....

SRI SHIVAM VARSHNEY(J.E) *SV*

FIELD SUB DIV. NAME

P.T.O