


PTW TFR

App. No 1008353144

तकनीकी आख्या रिपोर्ट

- (1) उपभोक्ता का नाम व पता श्री श्रवण कुमार श्री खटाड़, नि 110
बान्जारी, पो सन्तराह भाफी खटाड़, पी 80 शाखा 15
- (2) एच टी लाइन से दूरी 250 मीटर
- (3) उपकेन्द्र का नाम 33/11 KV एस आलम नगर
- (4) फीडर का नाम 11KV पाटा पीडल
- (5) 11 के वी फीडर का लोड 357 Amp
- (6) बकाये की स्थिति है
- (7) परिसर पर मोंटर लगाने हेतु स्थान की उपलब्धता 31 मी नही
- (8) परिसर पर बकाये की स्थिति नही
- (8a) यदि हो तो संयोजन संख x
- (9) वाद - विवाद की स्थिति नही

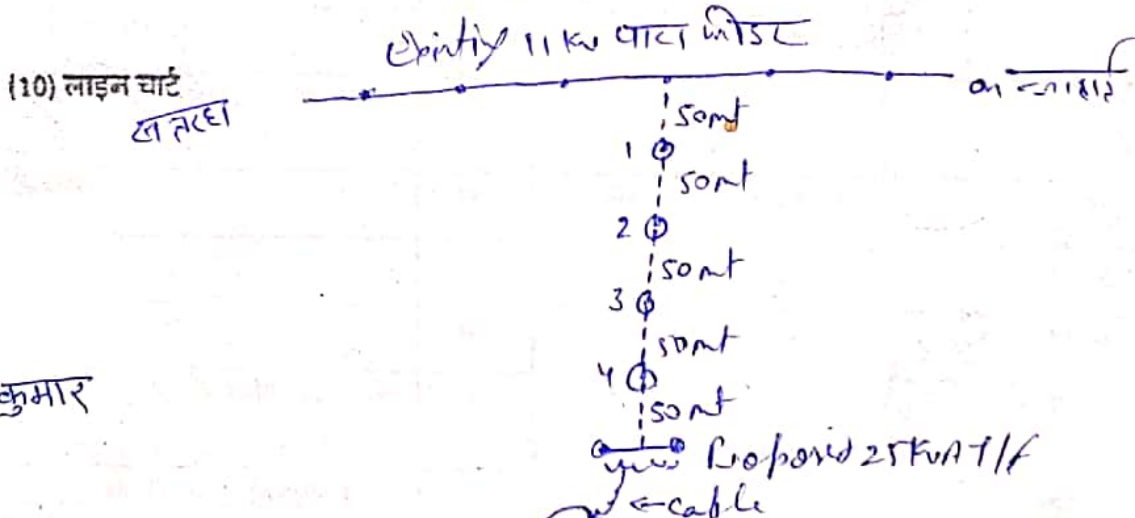

श्रवण कुमार

Proposed New PTW Connection
BHP

(Handwritten signatures and marks)

PROJECT ESTIMATE

MADHYANCHAL VIDYUT VITARAN NIGAM LTD.

(A State Government Undertaking)

Head office 4-A, Gokhale Marg, Lucknow 226001

Ph No. 0522-2208737 GSTIN: 09AAECM0108J1ZO

Project Description : SHRAVAN_KUMAR_1008353144

PTW

Project Code : MVDP.HR.PD0131

Estimate Value : 126,960.00

Estimate Printout Date : 26.11.2023

Previous Approved Version : N.A.

Fund (Project Code) : PTW_DEP0SI

SR. NO.	PARTICULARS	UNIT	QTY	RATE(RS.)	AMOUNT
	Material & Service-Lines&Cable - MVDP.HR.PD0131.A				
1	DANGER BOARD - 2700000187	No	1.000	461.00	461.00
2	DROPPER ANGLE - 1800000006	No	1.000	748.00	748.00
3	PCC POLE 8.5 MTR.LONG - 1500000000	No	6.000	2,721.00	16,326.00
4	STAY SET 16X1800 - Complete 2700000131	No	3.000	549.00 909.7	1,647.00 2,729.1
5	11 KV COMPOSITE POLYMER PIN INSULATOR - 2700000193	No	18.000	268.00	4,824.00
6	STAY CLAMP 5/2" - 2500000034	PAA	3.000	304.00	912.00
7	A.C.S.R. WEASEL CONDUCTOR - 1000000028	M	775.000	24.00	18,600.00
8	STONE PAD 300X300X75MM - 2700000147	No	6.000	140.00	840.00
9	EARTH ROD 2540X20 MM - 1700000133	No	6.000	838.00	5,028.00
10	HOLDING CLAMP FOR PCC POLE 8.5 MTR. - 2500000002	No	15.000	304.00	4,560.00
11	11KV F-CLAMP FOR PCC POLE - 2500000048	No	4.000	265.00	1,060.00
12	11KV COMP. POLY. DISC INSULATOR 45KN T&C - 2700000173	No	6.000	264.00	1,584.00
13	TEE-OFF CHANNEL - 1800000012	No	1.000	140.00 478.00	140.00 478.00
14	TOP CHANNEL - 1800000013	No	1.000	832.00	832.00
15	M.S. ANGLE 65X65X6 M.M. - 1800000000	KG	24.000	148.00	3,552.00
16	11 KV V-TYPE STEEL CROSS-ARM 65X65X6 MM - 2700000161	No	4.000	744.00	2,976.00
	Sub Total - Material (Rs.)				67,950.00 64,090.00
1	SECURITY CHARGE - 1000001733	No	8.000	300.00	2,400.00

Sub Total - Services (Rs.)			2,400.00
Material & Service-Lines&Cable - (Rs.)			66,490.00
Material & Service-Plant&Machinery - MVDP.HR.PD0131.B			
1	TD 25KVA/11/0.43KV L-II 4 STAR AL. WOUND - 2000000006	No 1.000 56,780.00	56,780.00
Sub Total - Material (Rs.)			56,780.00
Total - Material & Service-Plant&Machinery - (Rs.)			56,780.00
Contingency Charges - MVDP.HR.PD0131.Z			124730.00
1	Contingency Charges		3,690.00 3741.90
Sub Total - Charges (Rs.)			3,690.00
Total - Contingency Charges - (Rs.)			3,690.00
Total(Materials + Services + Charges) (Rs.)			126,960.00
Return Material - MVDP.HR.PD0131.A			
Grand Total (Rs.)			126,960.00

Amount in Words: One Lakh Twenty Six Thousand Nine Hundred Sixty Rupees Only

120472.90

(Junior Engineer)
Kishan Pal
11001364
APPROVED - 26.11.2023

(AE-E&M)
Kuldeep Singh
11001355

Chb. Head... PTW/P-Set
Sanction No SBD/..... 2023-24
Chb. To UPPCL Rs.. Nil
Chb. To Consumer Rs. 120472.00
TOTAL Rs 120472.00

Rs One Lakh Twenty Eight Thousand Four Hundred Seventy Two Only

AP
S.D.D. Shahabad, Hardoi